


GT Contact CO.,LTD

GT152264-21XX0 Field Installable Instructions

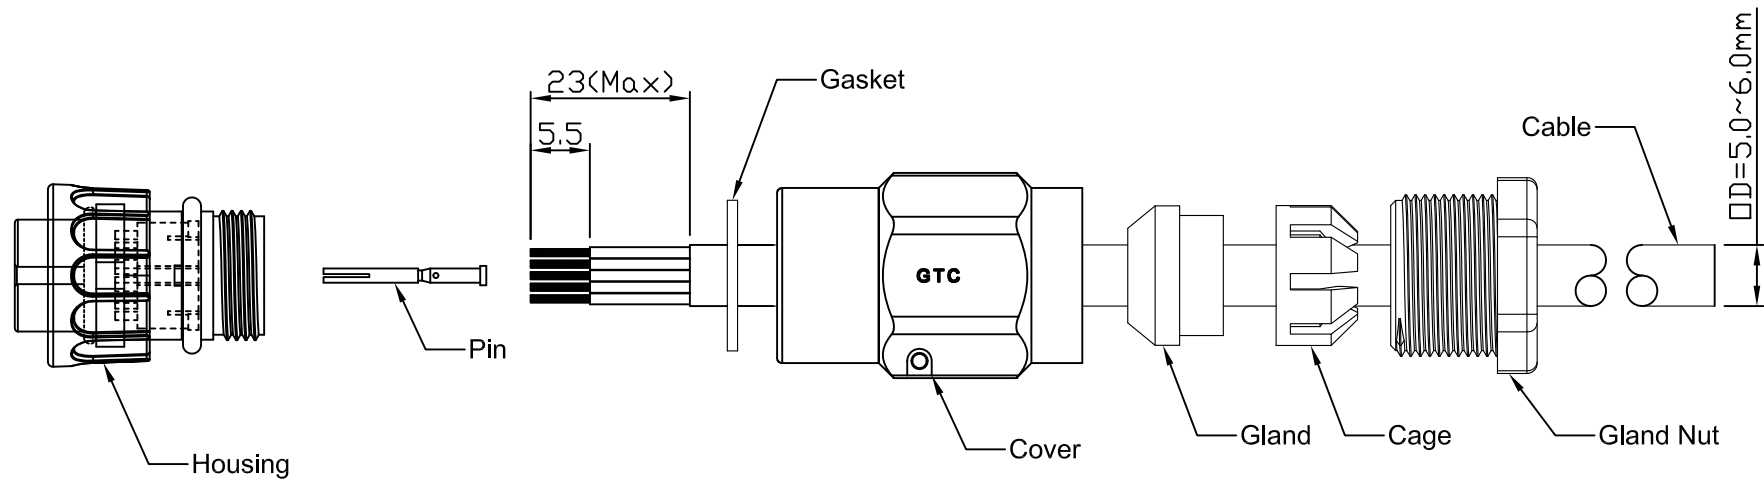

- 1.) Strip cable jacket 23.0mm
- 2.) Pass cable through all components.
- 3.) Pin be suitable with 22~26AWG.
- 4.) Assembly gasket, cover to housing, tightening (6.0 to 7.0 kgf-cm)
- 5.) Assembly gland, cage, gland nut to housing, tightening (9.0 to 10.0 kgf-cm)

<http://www.gtcontact.com>
Contact: sales@gtcontact.com