


# GT Contact CO.,LTD

## GT152264-23XXB Field Installable Instructions

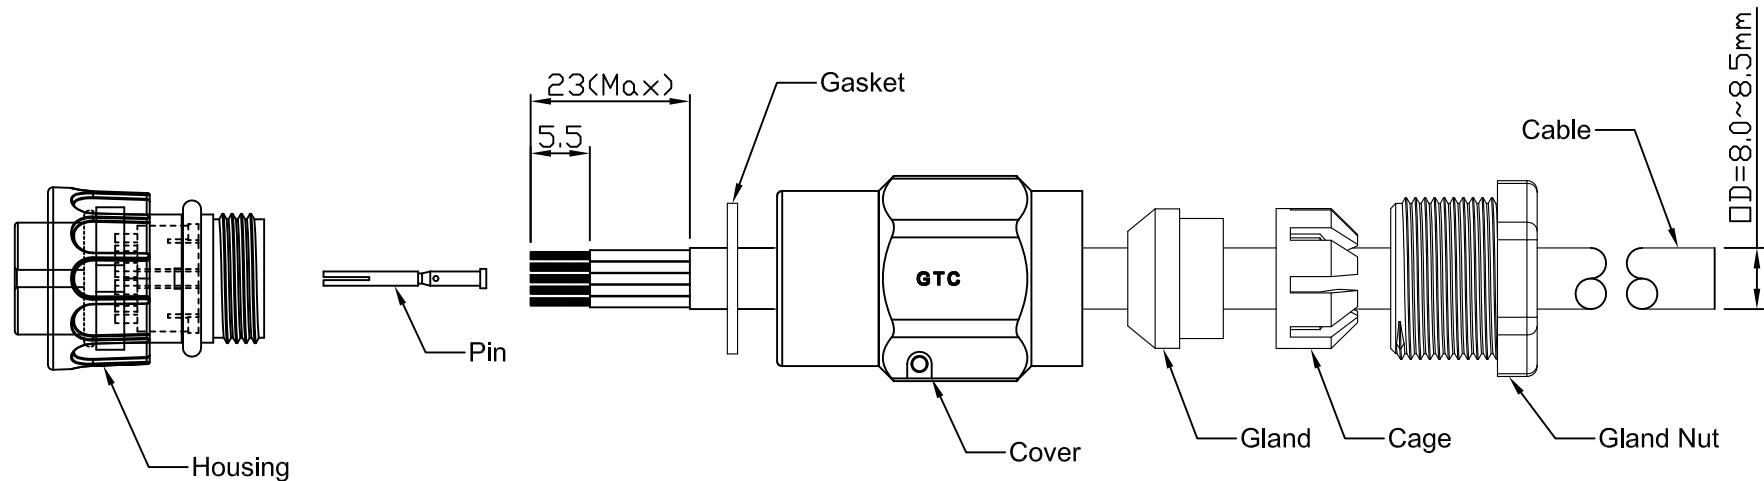

- 1.) Strip cable jacket 23.0mm
- 2.) Pass cable through all components.
- 3.) Pin be suitable with 16~18AWG.
- 4.) Assembly gasket, cover to housing, tightening(6.0 to 7.0 kgf-cm)
- 5.) Assembly gland, cage, gland nut to housing, tightening(9.0 to 10.0 kgf-cm)

<http://www.gtcontact.com>  
Contact:sales@gtcontact.com