


GT Contact CO.,LTD

GT153264-2214X Field Installable Instructions

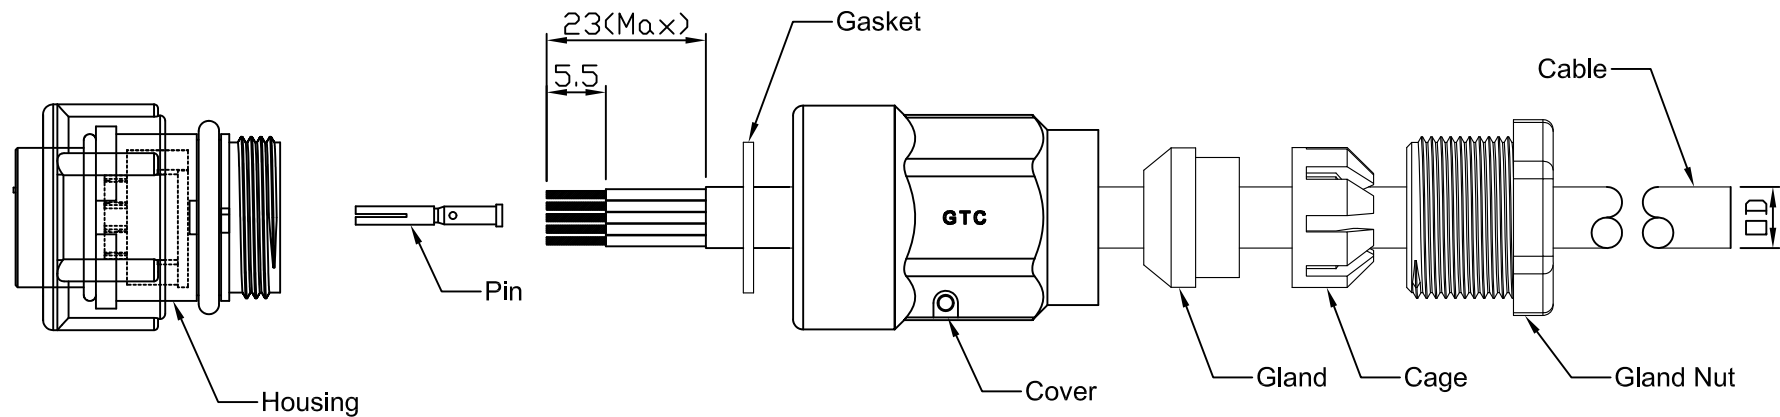

- 1.) Strip cable jacket 23.0mm
- 2.) Pass cable through all components.
- 3.) Pin be suitable with 24~20AWG.
- 4.) Assembly gasket, cover to housing, tightening(6.0 to 7.0 kgf-cm)
- 5.) Assembly gland, cage, gland nut to housing, tightening(9.0 to 10.0 kgf-cm)
- 6.) GT153264-22140 Suitable Cable OD=5.0mm To 6.0mm.
- 7.) GT153264-2214B Suitable Cable OD=6.0mm To 8.5mm.

<http://www.gtcontact.com>
Contact:sales@gtcontact.com