



GT Contact CO.,LTD


GT225330-00 Field Installable Instructions

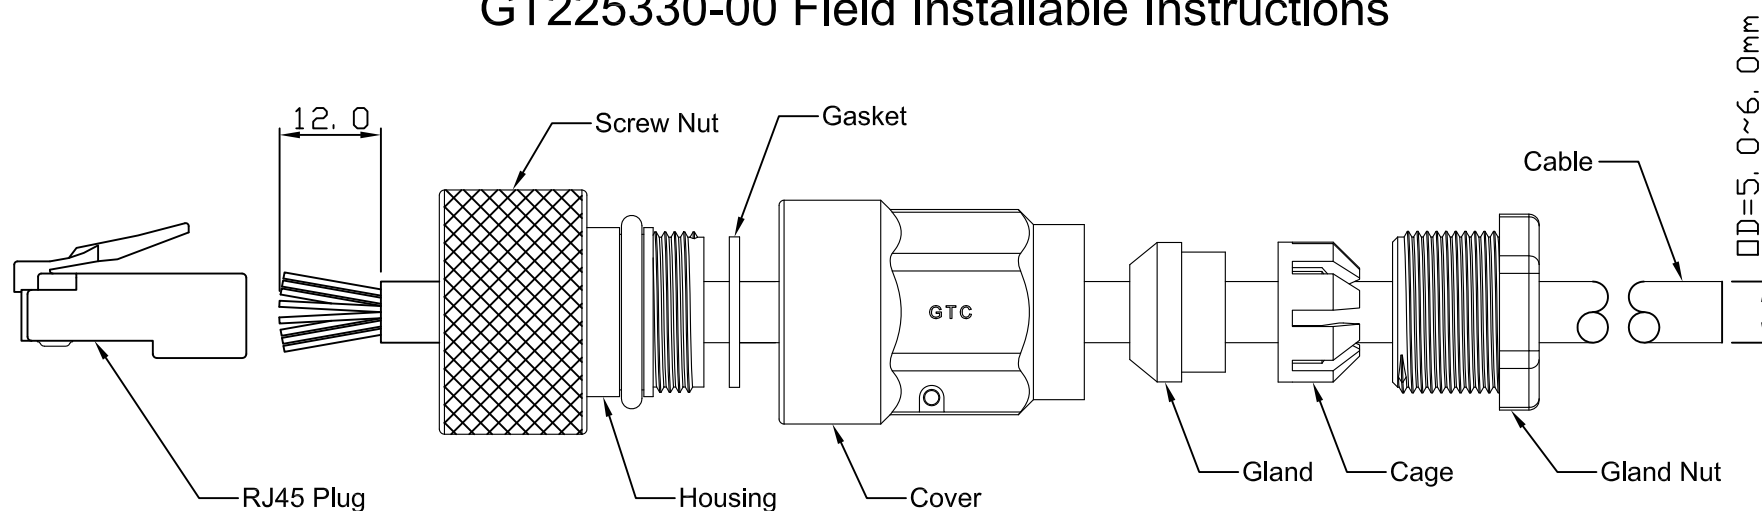

- 1.) Strip cable jacket 12.0mm
- 2.) Pass cable through all components
- 3.) RJ45 plug shrapnel with presses 6.02 ± 0.13 mm
- 4.) Resection RJ45 plug latch

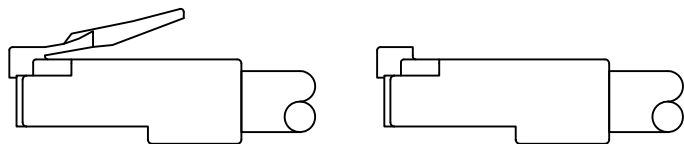

The Key Is Under The Plug

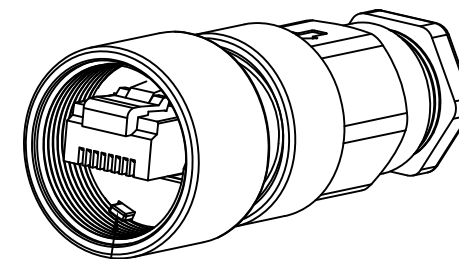

- 5.) Assembly gasket, cover to housing, tightening (6.0 to 7.0 kgf-cm)
- 6.) Assembly gland, cage, gland nut to housing, tightening (9.0 to 10.0 kgf-cm)

<http://www.gtcontact.com>
 Contact: sales@gtcontact.com