

1

2



3

4


Notes: (Unless Otherwise Specified)

1. Waterproof Rate: IP67.
2. Recommend Panel Thickness: 0.8 to 4.5 mm.
3. Recommend Torque: 14~15 Kgf-cm.
4. Mating Cap P/N: GT1C1310X2.
5. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
01			Aileen 11/16/20	Lucas 11/16/20	Ray 11/16/20

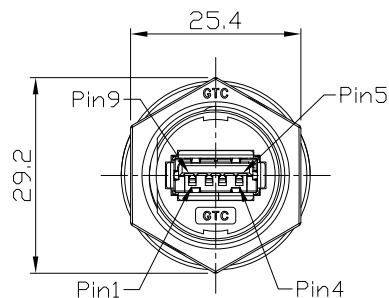

Recommend
Panel Cut-Out

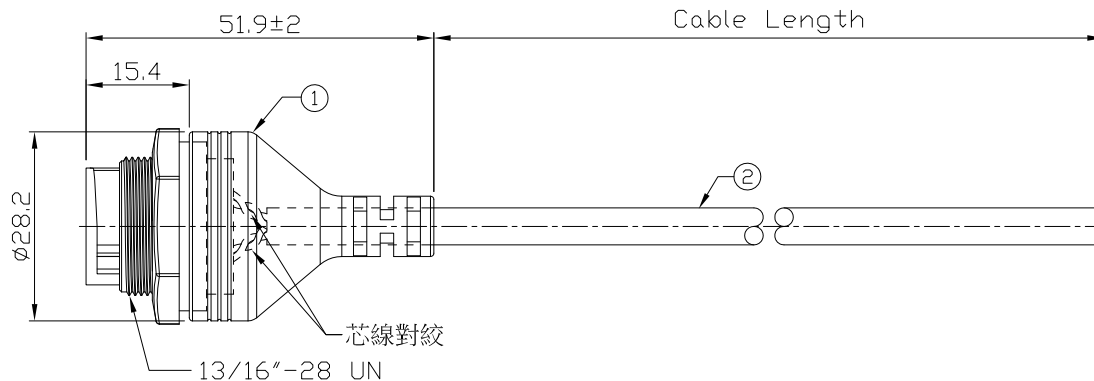

1	Red
2	White
3	Green
4	Black
5	Blue
6	Yellow
7	Drain
8	Purple
9	Orange
Shell	Braid

Wiring Diagram

GT118210-01-03	3000 mm	+100
GT118210-01-02	2000 mm	+100
GT118210-01-01	1000 mm	+50
GT118210-01-Z9	900 mm	+50
GT118210-01-Z8	800 mm	+50
GT118210-01-Z7	700 mm	+50
GT118210-01-Z6	600 mm	+50
GT118210-01-Z5	500 mm	+50
GT118210-01-Z4	400 mm	+50
GT118210-01-Z3	300 mm	+25
GT118210-01-Z2	200 mm	+25
Part No.	Cable Length	Tol.

2	Cable	UL2725 (1P*28AWG/EA)*2+(1PR*28AWG+A)+2C*22AWG+AB 85% Color: Black, OD=5.5mm	1
1	USB-A 3.0 Plastic C3 Panel Jack Lock	GT Contact P/N: GT118210-01	1
Item	Part Name	Material / Finish	Q'ty

TITLE						DRAWING NUMBER			REV.	
USB-A 3.0 Plastic C3 Panel Jack Lock With Cable						GT118210-01-XX			01	
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	X.X X.XX	± 0.5 ± 0.2	X.XXX ANGLES ± 1°	mm	1/1
						TOLERANCES			UNIT	SHEET

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT CONTACT CO.,LTD. THE POSSESSOR AGREES TO THE FOLLOWING:
(i) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
(ii) NOT TO REPRODUCE OR COPY IT
(iii) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
(iv) ALL RIGHTS RESERVED