


Notes: (Unless Otherwise Specified)


1. Waterproof Rate: IP67.
2. Recommend Panel Thickness: 0.8 to 6.0 mm.
3. Recommend Torque: 14~15 Kgf-cm.
4. Mating Cap P/N: GT1C5331X2.
5. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A5	ECN-170506	Heat Shrink Tube With Adhesive Lined 	Joyce 05/12/17	Lucas 05/12/17	Ray 05/12/17

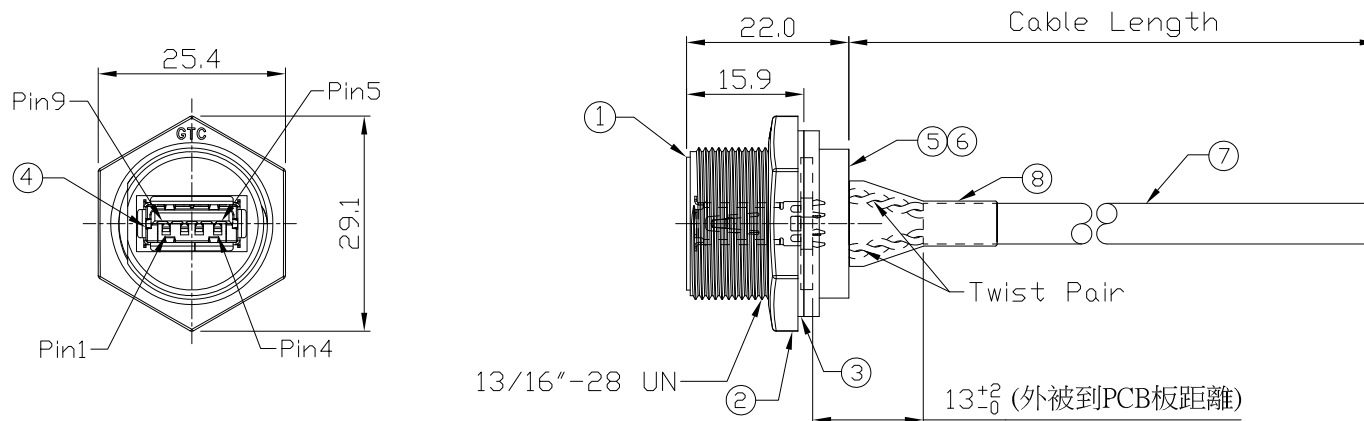

GTC
DOC.CENTER.ISSUE
MAY.12.2017
ONLY FOR
RELEASE

8	Shrink Tube	L=25mm, Heat Shrink Tube With Adhesive Lined Color: Black	1	
7	Cable	UL2725 (1P*28AWGEAM)*2+(1PR*28AWG+A)+2C*22AWG+AB 85% Color: Black, OD=5.5mm	1	
6	Glue	Epoxy Color: Black		
5	PCB	FR-4 Color: —	1	
4	USB-A 3.0 Receptacle	Housing: Thermoplastic, Color: Blue Contacts: Copper Alloy, Finish: Au Plated Shell: Copper Alloy, Finish: Ni Plated	1	
3	Gasket	Silicone Color: Black	1	
2	Hex Nut	Thermoplastic Color: Black	1	
1	Housing	Thermoplastic Color: Black	1	
Item	Part Name	Material / Finish	Q'ty	



Recommend
Panel Cut-Out

Red	1
White	2
Green	3
Black	4
Blue	5
Yellow	6
Drain	7
Purple	8
Orange	9
Braid	Shell

Wiring Diagram

GT118300-01-02	2000 mm	±100
GT118300-01-01	1000 mm	±50
GT118300-01-Z9	900 mm	±40
GT118300-01-Z8	800 mm	±40
GT118300-01-Z7	700 mm	±40
GT118300-01-Z6	600 mm	±40
GT118300-01-Z5	500 mm	±40
GT118300-01-Z4	400 mm	±20
GT118300-01-Z3	300 mm	±20
GT118300-01-Z2	200 mm	±10
GT118300-01-Z1	100 mm	±10
Part No.	Cable Length	Tol.

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT Contact CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:
(i) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
(ii) NOT TO REPRODUCE OR COPY IT
(iii) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
(iv) ALL RIGHTS RESERVED

TITLE						DRAWING NUMBER				REV.	
USB-A 3.0 Plastic C3 Panel Jack Screw With Cable						GT118300-01-XX				A5	
	B	1:1	Joyce 03/27/13	Lucas 03/27/13	Ray 03/27/13	X.X X.XX	± 0.5 ± 0.2	X.XXX ANGLES	± 0.05 ± 1°	mm	1/1
DO NOT SCALE DRAWINGS	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES				UNIT	SHEET
THIRD ANGLE PROJECTION											