

1

2

3





4

Notes: (Unless Otherwise Specified)

- 1. Waterproof Rate: IP67.
- 2. Recommend Panel Thickness: 0.8 to 6.0 mm.
- 3. Recommend Torque: 14~15 Kgf-cm.
- 4. Mating Cap P/N: GT1C5331X2.
- 5. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A0			Jenny 02/22/22	Lucas 02/22/22	Ray 02/22/22

GTC  
DOC.CENTER.ISSUE  
FEB.23.2022  
ONLY FOR  
RELEASE

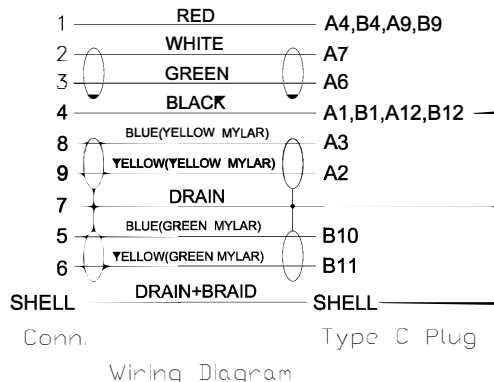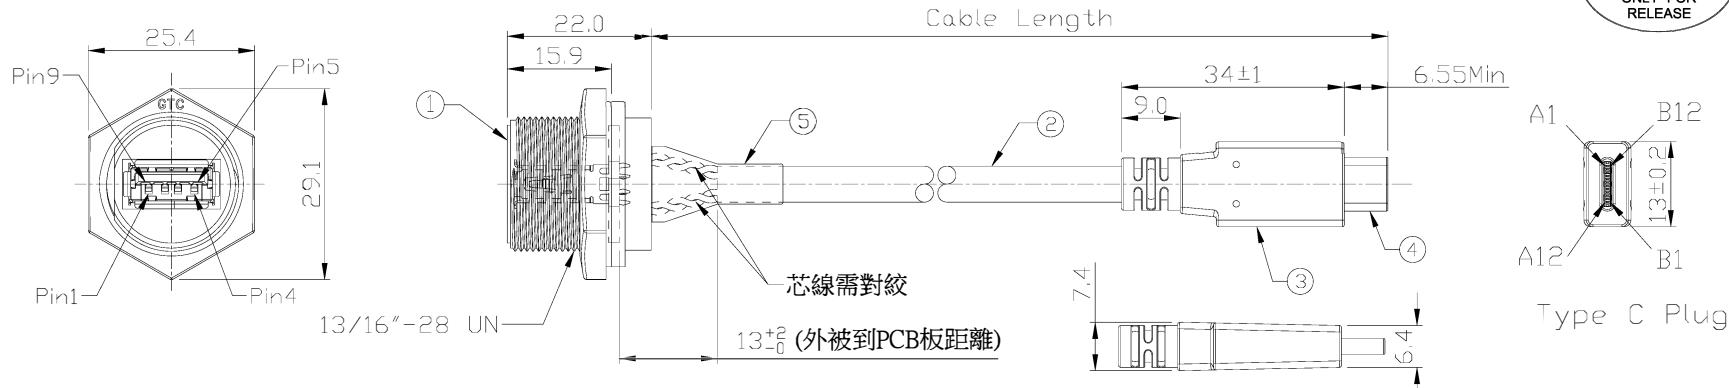

Part No.	Cable Length	Tol.
GT118300-0C-05	5000 mm	+150
GT118300-0C-04	4000 mm	+150
GT118300-0C-03	3000 mm	+100
GT118300-0C-02	2000 mm	+100
GT118300-0C-01	1000 mm	+50
GT118300-0C-Z9	900 mm	+50
GT118300-0C-Z8	800 mm	+50
GT118300-0C-Z7	700 mm	+50
GT118300-0C-Z6	600 mm	+50
GT118300-0C-Z5	500 mm	+50
GT118300-0C-Z4	400 mm	+50
GT118300-0C-Z3	300 mm	+25
GT118300-0C-Z2	200 mm	+25
GT118300-0C-Z1	100 mm	+25

Item	Part Name	Material / Finish	Q'ty
5	Shrink Tube	L=25mm, Heat Shrink Tube With Adhesive Lined Color: Black	1
4	Over Mold	PVC Color: Black	1
3	USB Type C 3:1 Plug	Housing: Thermoplastic, Color: Black Contacts: Copper Alloy, Finish: Au Plated Shell: Stainless Steel, Finish: Au Plated	1
2	Cable	UL2725 (1P/30H+EAM)*2+(1P/30H)+(2C/24F)+AEB(AL)65% Color: Black, OD=5.0mm PVC JACKET.	1
1	USB-A 3.0 C3 Panel Jack	GT Contact P/N: GT118300-01-XX	1

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT CONTACT CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:

(C) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE  
(C) NOT TO REPRODUCE OR COPY IT  
(C) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART  
(C) ALL RIGHTS RESERVED

TITLE						DRAWING NUMBER			REV.
USB-A 3.0 Plastic C3 Panel Jack Screw With Type C Plug						GT118300-0C-XX			A0
DO NOT SCALE DRAWINGS	B	1:1	Jenny 02/22/22	Lucas 02/22/22	Ray 02/22/22	XX ± 0.5 X.XX ± 0.2	XXX ± 0.05 ANGLES ± 1°	mm	1/1
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET

1

2

3

4