

1

2

3


4

Notes: (Unless Otherwise Specified)

1. Waterproof Rate: IP67.
2. RoHS Compliant.



REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A2	ECN-240625	STEEL WITH NICKEL PALTED=>STEEL WITH Au PALTED	Lucas 06/26/24	Lucas 06/26/24	Ray 06/26/24

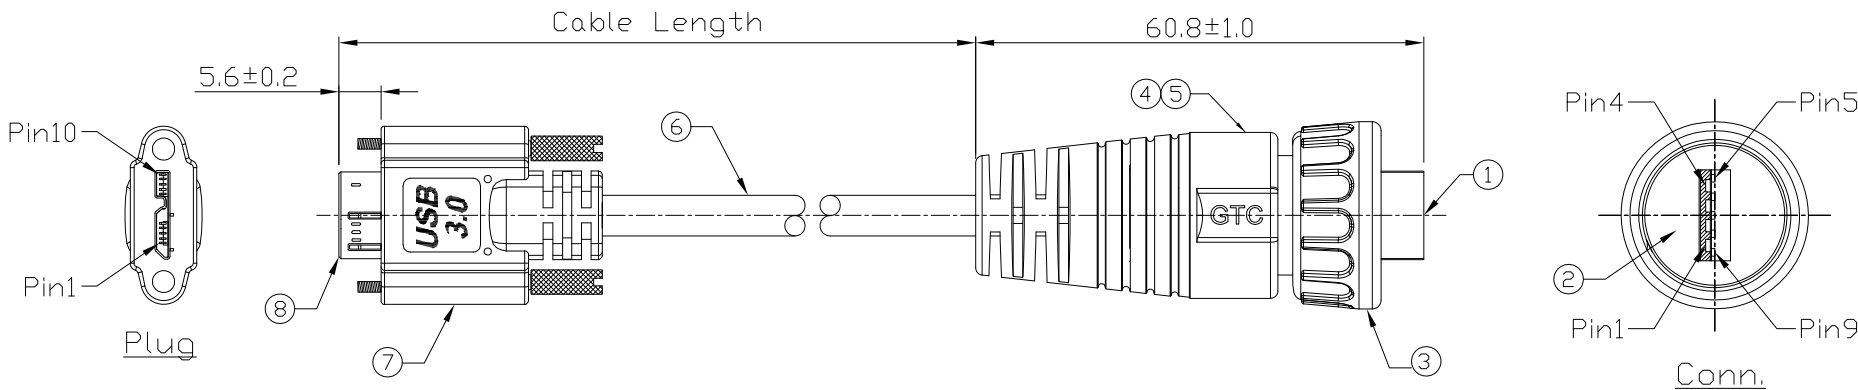

8	Micro USB-B 3.0 Plug	Housing: Thermoplastic, Color: Black Contacts: Copper Alloy, Finish: Au Plated Shell: Copper Alloy, Finish: Au Plated	1	△
7	Over Mold	PVC Color: Black	1	
6	Cable	UL2725 (1P*28AWGEAM)*2+(1PR*28AWG+A)+2C*24AWG+AB 85% Color: Black, OD=5.5mm	1	
5	Over Mold	PVC Color: Black	1	
4	Inner Mold	Thermoplastic Color: Black	1	
3	Screw Nut	Thermoplastic Color: Black	1	
2	Rubber Pad	Silicone Color: Black	1	
1	USB-A 3.0 Plug	Housing: Thermoplastic, Color: Blue Contacts: Copper Alloy, Finish: Au Plated Shell: Cold Roll Steel, Finish: Au Plated	1	△
Item	Part Name	Material / Finish	Qty	

1	Red	1
2	White	2
3	Green	3
5	Black	4
6	Blue	5
7	Yellow	6
8	Drain	7
9	Purple	8
10	Orange	9
Shell	Braid	Shell
Plug		Conn.

Wiring Diagram

GT118320-04-03	3000 mm	+100
GT118320-04-02	2000 mm	+100
GT118320-04-01	1000 mm	+50
GT118320-04-Z9	900 mm	+50
GT118320-04-Z8	800 mm	+50
GT118320-04-Z7	700 mm	+50
GT118320-04-Z6	600 mm	+50
GT118320-04-Z5	500 mm	+50
GT118320-04-Z4	400 mm	+50
GT118320-04-Z3	300 mm	+25
GT118320-04-Z2	200 mm	+25
Part No.	Cable Length	Tol.

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT CONTACT CO.,LTD. THE POSSESSOR AGREES TO THE FOLLOWING:
(i) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
(ii) NOT TO REPRODUCE OR COPY IT
(iii) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
(iv) ALL RIGHTS RESERVED

TITLE USB-A 3.0 Plastic C3 Cable End Plug Screw With Cable + Micro USB-B 3.0 Plug						DRAWING NUMBER GT118320-04-XX				REV. A2	
 DO NOT SCALE DRAWINGS	B	1:1	Joyce 09/07/17	Lucas 09/07/17	Ray 09/07/17	X.X X.XX	± 0.5 ± 0.2	X.XXX ANGLES	± 0.05 ± 1°	mm	1/1
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES				UNIT	SHEET

1

2

3

4