

1

2

3




4

Notes: (Unless Otherwise Specified)

- 1. Waterproof Rate: IP67.
- 2. RoHS Compliant.
- 3. Type C -Pin Out Is The Same As This Drawing.
- 4. UL Certification file #E364108.



REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A0	ECN-240621	STEEL WITH NICKEL PALTED=>STEEL WITH Au PALTED	Lucas 06/26/24	Lucas 06/26/24	Ray 06/26/24

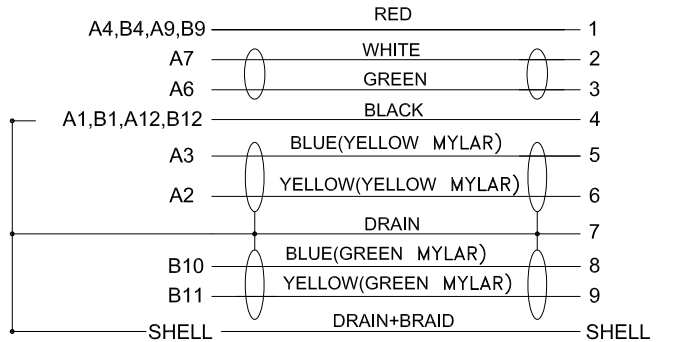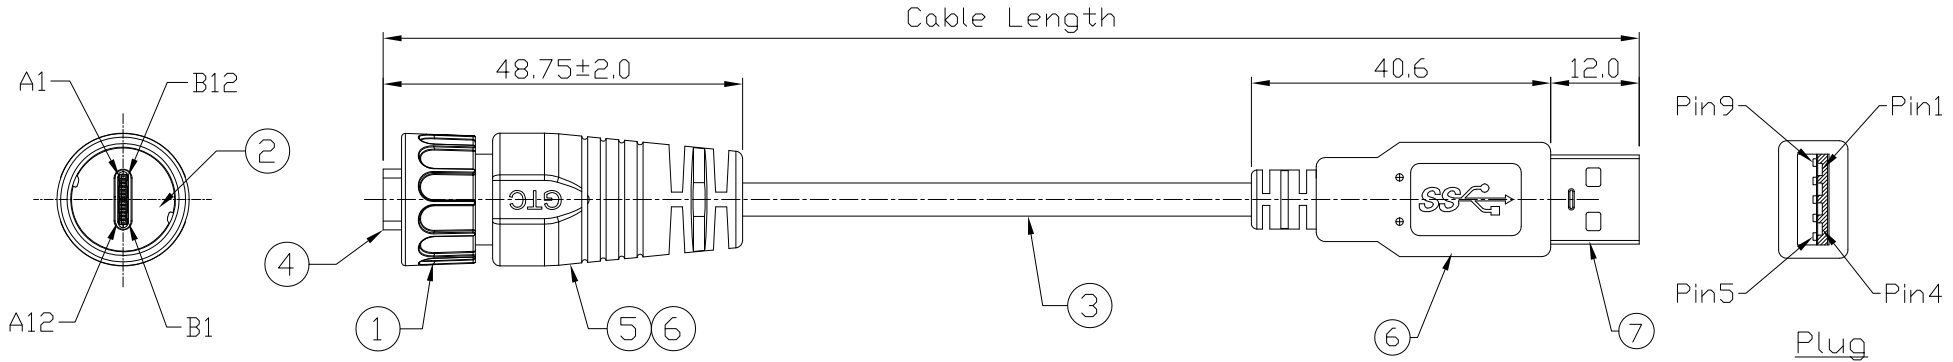

Part No.	Cable Length	Tol.
GT11C220-04-02	2000 mm	+100
GT11C220-04-01	1000 mm	+50
GT11C220-04-29	900 mm	+50
GT11C220-04-28	800 mm	+50
GT11C220-04-27	700 mm	+50
GT11C220-04-26	600 mm	+50
GT11C220-04-25	500 mm	+50
GT11C220-04-24	400 mm	+50
GT11C220-04-23	300 mm	+25
GT11C220-04-22	200 mm	+25

Item	Part Name	Material / Finish	Q'ty
7	USB-A 3.0 Plug	Housing: Thermoplastic, Color: Blue Contacts: Copper Alloy, Finish: Au Plated Shell: Cold Roll Steel, Finish: Au Plated	1
6	Over Mold	PVC Color: Black	2
5	Inner Mold	PVC Color: Black	1
4	USB Type C 3.1	Housing: Thermoplastic, Color: Black, Resistor<56KΩ> Contacts: Copper Alloy, Finish: Au Plated Shell: Stainless Steel, Finish: Au Plated	1
3	Cable	UL2725 (1P/30#+EAM)*2+(1P/30#)+<2C/24#>+AEB<AL>65% ØD:5.0mm, BLACK PVC JACKET.	1
2	Rubber Pad	Silicone Color: Black	1
1	Lock Nut	Thermoplastic Color: Black	1

TITLE USB 3.1 Type C Plastic C2 Cable End Plug Lock With USB-A 3.0 Plug						DRAWING NUMBER GT11C220-04-XX			REV. A0	
THIRD ANGLE PROJECTION	SIZE B	SCALE 1:1	DRAW / DATE Lucas 11/04/19	CHECK / DATE Lucas 11/04/19	APPROVE / DATE Ray 11/04/19	TOLERANCES X.X ± 0.5 X.XX ± 0.2		UNIT mm	SHEET 1/1	

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT Contact CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:
(1) NOT TO REPRODUCE OR COPY IT
(2) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
(3) ALL RIGHTS RESERVED

1

2

3

4