

1

2





3

4


Notes: (Unless Otherwise Specified)

- 1. Waterproof Rate: IP67.
- 2. Recommend Panel Thickness: 0.8 to 3.0 mm.
- 3. Recommend Torque: 9~10 Kgf-cm.
- 4. RoHS Compliant.
- 5. Type C AB面接點需跟圖面一致.
- 6. UL Certification file #E364108.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
02	ECN-200820	Modify Dimension	Lucas 08/25/20	Lucas 08/25/20	Ray 08/25/20

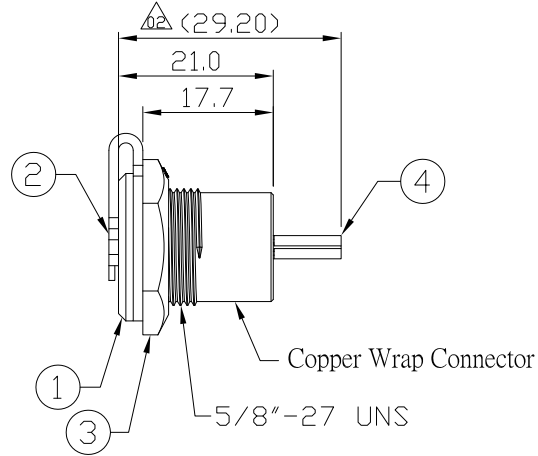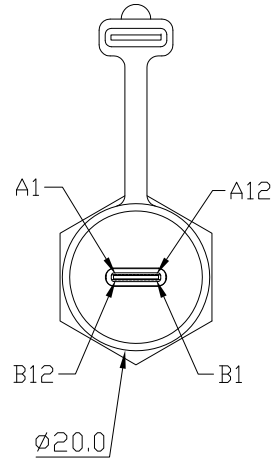

Recommend Panel Cut-Out



Item	Part Name	Material / Finish	Q'ty
5	Glue	Epoxy Color: Black	
4	USB Type C 3.1	Housing: Thermoplastic, Color: Black	2
		Contacts: Copper Alloy, Finish: Au Plated	
		Shell: Stainless Steel, Finish: Au Plated	
3	Hex Nut	Thermoplastic Color: Black	1
2	Cap	GT Contact P/N: GT5C1C4092	1
1	Housing	Thermoplastic Color: Black	1

TITLE USB 3.1 Type C Plastic C2 Panel Jack Coupler						DRAWING NUMBER GT11C401-30-C			REV. 02
THIRD ANGLE PROJECTION	SIZE B	SCALE 1:1	DRAW / DATE Lucas 01/13/20	CHECK / DATE Lucas 01/13/20	APPROVE / DATE Ray 01/13/20	TOLERANCES X.X ± 0.5 X.XX ± 0.2	UNIT mm	SHEET 1/1	
						X.XXX ± 0.05 ANGLES ± 1°			

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:  
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT Contact CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:  
(i) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE  
(ii) NOT TO REPRODUCE OR COPY IT  
(iii) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART  
(iv) ALL RIGHTS RESERVED

1

2

3

4