


Notes: (Unless Otherwise Specified)
 1. Waterproof Rate: IP67.
 2. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A0	ECN-180705	Revision: 01 => A0	Whitney 07/10/18	Lucas 07/10/18	Ray 07/10/18

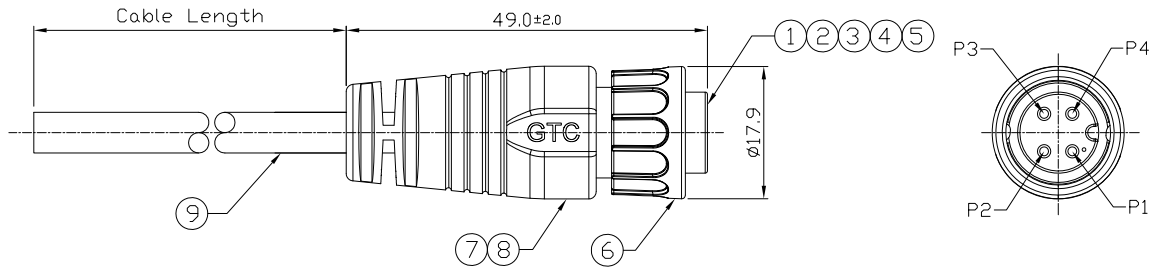

GT152224-22041-10	10000 mm	±500
GT152224-22041-09	9000 mm	±450
GT152224-22041-08	8000 mm	±400
GT152224-22041-07	7000 mm	±150
GT152224-22041-06	6000 mm	±150
GT152224-22041-05	5000 mm	±150
GT152224-22041-04	4000 mm	±150
GT152224-22041-03	3000 mm	±150
GT152224-22041-02	2000 mm	±100
GT152224-22041-01	1000 mm	±50
GT152224-22041-Z9	900 mm	±40
GT152224-22041-Z8	800 mm	±40
GT152224-22041-Z7	700 mm	±40
GT152224-22041-Z6	600 mm	±40
GT152224-22041-Z5	500 mm	±40
GT152224-22041-Z4	400 mm	±20
GT152224-22041-Z3	300 mm	±20
GT152224-22041-Z2	200 mm	±10
Part No.	Cable Length	Tol.

9	Cable	UL2464 24AWG*4C+Al/My+D (UV) OD=4.5mm, Color: Black	1
8	Over Mold	PVC Color: Black	1
7	Inner Mold	Thermoplastic Color: White Or Black	1
6	Lock Nut	Thermoplastic Color: Black	1
5	O-Ring	Silicone Color: Red	1
4	Contacts	Copper Alloy Finish: Au Plated	4
3	Gland Pin	Thermoplastic Color: Black	1
2	Base	Thermoplastic Color: Black	1
1	Housing	Thermoplastic Color: Black	1
Item	Part Name	Material / Finish	Q'ty

GTC
 DOC.CENTER.ISSUE
 JUL.10.2018
 ONLY FOR
 RELEASE

1	Black
2	Brown
3	Red
4	Orange
	Drain

Wiring Diagram

TITLE						DRAWING NUMBER			REV.	
C2 5A 4P Cable End Female Lock						GT152224-22041-XX			A0	
	B	1:1	Joyce 10/01/14	Lucas 10/01/14	Ray 10/01/14	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm	1/1	
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET	

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:
 THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT Contact CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:
 (i) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
 (ii) NOT TO REPRODUCE OR COPY IT
 (iii) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
 (iv) ALL RIGHTS RESERVED