

1

2








3

4


Notes: (Unless Otherwise Specified)

- 1. Waterproof Rate: IP67.
- 2. Suitable Cable \varnothing D=5.0mm To 6.0mm.
- 3. Recommend Housing Torque: 6~7 Kgf-cm.
- 4. Recommend Gland Nut Torque: 9~10 Kgf-cm.
- 5. RoHS Compliant.


REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A0		Mass Production	Hank 06/16/14	Ray 06/16/14	Ray 06/16/14



GTC
DOC.CENTER.ISSUE
JUL.10.2014
ONLY FOR
RELEASE

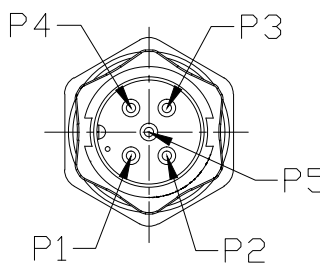

Pin Assignment

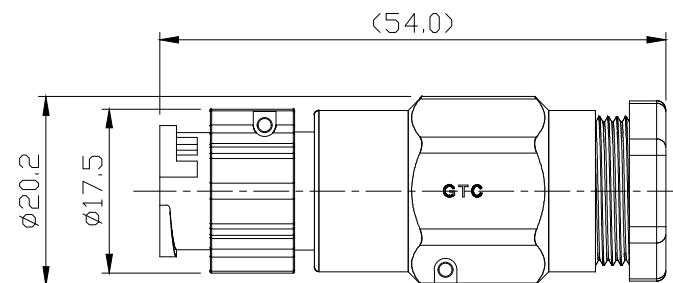

9	Base	Thermoplastic Color: Black	1
8	Gland Nut	Thermoplastic Color: Black	1
7	Cage	Thermoplastic Color: White	1
6	Gland	Silicone Color: Green	1
5	Cover	Thermoplastic Color: Black	1
4	Gasket	Silicone Color: Black	1
3	Contacts	Copper Alloy, GTC P/N:GT51C05-20020 Finish: Au Plated	5
2	O-Ring	Silicone Color: Red	1
1	Housing	Thermoplastic Color: Black	1
Item	Part Name	Material / Finish	Qty

TITLE	DRAWING NUMBER	REV.
C2 5A 5P Field Installable Cable To Cable Male Crimp Lock	GT152294-22050	A0

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT Contact CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:

- (i) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
- (ii) NOT TO REPRODUCE OR COPY IT
- (iii) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
- (iv) ALL RIGHTS RESERVED

	B	N/A	Hank 06/16/14	Ray 06/16/14	Ray 06/16/14	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm	1/1
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES	UNIT	SHEET	

1

2

3

4