


1

2








3

4


Notes: (Unless Otherwise Specified)

1. Waterproof Rate: IP67.
2. Suitable Cable \varnothing D=6.0mm To 8.5mm. 
3. Recommend Housing Torque: 6~7 Kgf-cm.
4. Recommend Gland Nut Torque: 9~10 Kgf-cm.
5. RoHS Compliant.


REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A1	ECN-190208	Cable Diameter: 7.0mm to 8.5mm => 6.0mm to 8.5mm	Whitney 03/05/19	Lucas 03/05/19	Ray 03/05/19




9	Base	Thermoplastic Color: Black	1
8	Gland Nut	Thermoplastic Color: Black	1
7	Cage	Thermoplastic Color: White	1
6	Gland	Silicone Color: Red	1
5	Cover	Thermoplastic Color: Black	1
4	Gasket	Silicone Color: Black	1
3	Contacts	Copper Alloy, GTC P/N:GT5IC10-16020 Finish: Au Plated	3
2	O-Ring	Silicone Color: Red	1
1	Housing	Thermoplastic Color: Black	1
Item	Part Name	Material / Finish	Q'ty

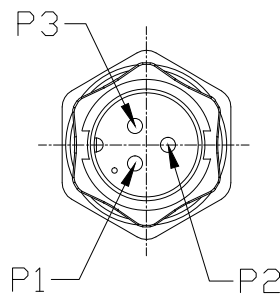

Pin Assignment

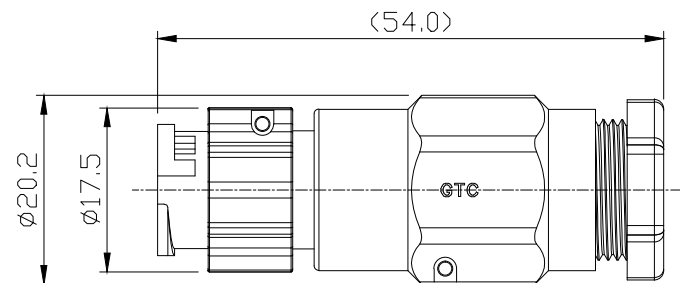

TITLE					DRAWING NUMBER			REV.	
C2 10A 3P Field Installable Cable To Cable Male Crimp Lock					GT152294-2303B			A1	
	B	N/A	Viola 07/31/18	Lucas 07/31/18	Ray 07/31/18	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm	1/1
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT Contact CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:

- (i) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
- (ii) NOT TO REPRODUCE OR COPY IT
- (iii) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
- (iv) ALL RIGHTS RESERVED

1

2

3

4