

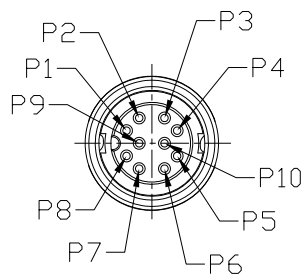


Notes: (Unless Otherwise Specified)
 1. Waterproof Rate: IP67.
 2. RoHS Compliant.

| REV | ECN# | DESCRIPTION OF REVISION | DRAW BY DATE | CHECK BY DATE | APPROVE BY DATE |
|-----|------|-------------------------|-------------------|-------------------|-----------------|
| 01 | | | Lucas 05/30/19 | Lucas 05/30/19 | Ray 05/30/19 |

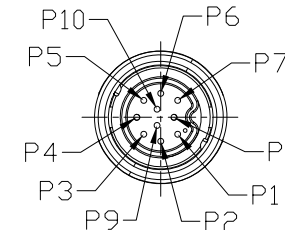

Conn.2

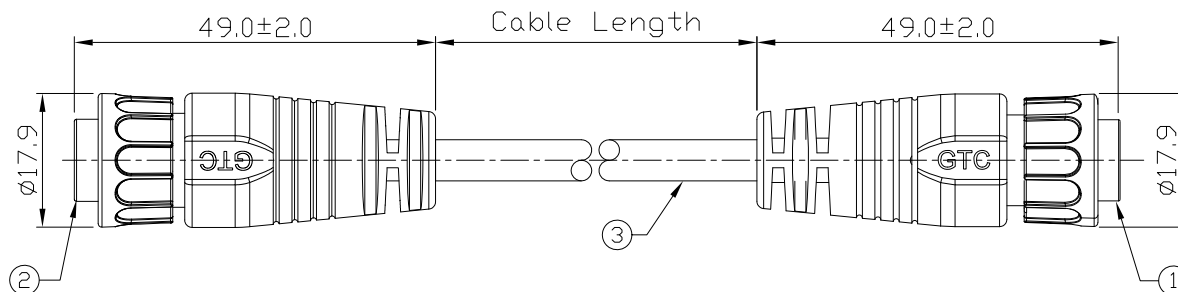

Conn.1

GTC
 DOC.CENTER.ISSUE
 MAY.30.2019
 ONLY FOR
 RELEASE

| | | |
|----|--------|----|
| 1 | Brown | 1 |
| 2 | Blue | 2 |
| 3 | White | 3 |
| 4 | Green | 4 |
| 5 | Yellow | 5 |
| 6 | Gray | 6 |
| 7 | Violet | 7 |
| 8 | Red | 8 |
| 9 | Black | 9 |
| 10 | Orange | 10 |

Conn.2

Conn.1

Wiring Diagram

| | | |
|-------------------|--------------|------|
| GT1522B4-21101-10 | 10000 mm | +500 |
| GT1522B4-21101-09 | 9000 mm | +450 |
| GT1522B4-21101-08 | 8000 mm | +400 |
| GT1522B4-21101-07 | 7000 mm | +150 |
| GT1522B4-21101-06 | 6000 mm | +150 |
| GT1522B4-21101-05 | 5000 mm | +150 |
| GT1522B4-21101-04 | 4000 mm | +150 |
| GT1522B4-21101-03 | 3000 mm | +100 |
| GT1522B4-21101-02 | 2000 mm | +100 |
| GT1522B4-21101-01 | 1000 mm | +50 |
| GT1522B4-21101-Z9 | 900 mm | +50 |
| GT1522B4-21101-Z8 | 800 mm | +50 |
| GT1522B4-21101-Z7 | 700 mm | +50 |
| GT1522B4-21101-Z6 | 600 mm | +50 |
| GT1522B4-21101-Z5 | 500 mm | +50 |
| GT1522B4-21101-Z4 | 400 mm | +50 |
| GT1522B4-21101-Z3 | 300 mm | +25 |
| GT1522B4-21101-Z2 | 200 mm | +25 |
| GT1522B4-21101-Z1 | 100 mm | +25 |
| Part No. | Cable Length | Tol. |

| Item | Part Name | Material / Finish | Q'TY |
|------|---------------------------------|---|------|
| 3 | Cable | UL2464 26AWG*10C+D+AU/My OD=6.0mm, Color:Black | 1 |
| 2 | C2 2A 10P Cable End Female Lock | GT Contact P/N: GT152224-21101-XX | 1 |
| 1 | C2 2A 10P Cable End Male Lock | GT Contact P/N: GT152234-21101-XX | 1 |

| TITLE | | | | | | DRAWING NUMBER | | | REV. |
|---|------|-------|----------------|----------------|----------------|-------------------------|-----------------------------|-----------|------|
| C2 2A 10P Cable End Male/Female Lock With Cable | | | | | | GT1522B4-21101-XX | | | 01 |
| THIRD ANGLE PROJECTION | SIZE | SCALE | DRAW / DATE | CHECK / DATE | APPROVE / DATE | TOLERANCES | | SHEET | |
| | B | 1:1 | Lucas 05/30/19 | Lucas 05/30/19 | Ray 05/30/19 | X.X ± 0.5 X.XX ± 0.2 | X.XXX ± 0.05 ANGLES ± 1° | mm 1/1 | |

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:
 THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT Contact CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:
 (a) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
 (b) NOT TO REPRODUCE OR COPY IT
 (c) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
 (d) ALL RIGHTS RESERVED