

1

2


3

4


Note:

1. Waterproof Rate: IP68.
2. Recommend Cable Diameter: 3.5~4.0 mm.
3. Recommend Cover Torque: 2.5~3.0 Kgf-cm.
4. Recommend Gland Nut Torque: 6.5~7.0 Kgf-cm.
5. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
01			Viola 03/05/18	Lucas 03/05/18	Ray 03/05/18

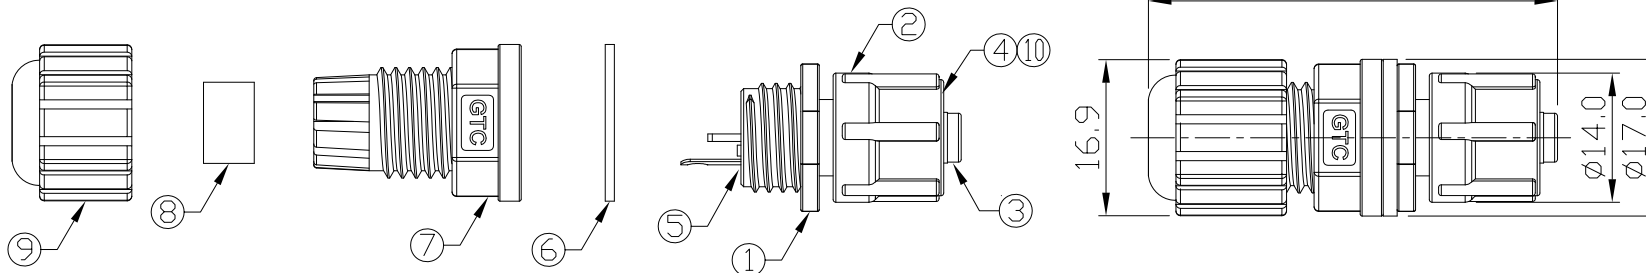

10	C-Ring	SWB Finish: Zn Plated	1
9	Gland Nut	Thermoplastic Color: Black	1
8	Gland	NBR Color: Black	1
7	Cover	Thermoplastic Color: Black	1
6	Gasket	EPDM Color: Black	1
5	Glue	Epoxy Color: Black	
4	O-Ring	Silicone Color: Red	1
3	DC Plug	Housing: Thermoplastic; Color: Black Neg. Terminal: Copper Alloy; Finish: Ni Plated Pos. Terminal: Copper Alloy; Finish: Ni Plated	1
2	Screw Nut	Thermoplastic Color: Black	1
1	Housing	Thermoplastic Color: Black	1
Item	Part Name	Material / Finish	Q'ty



TITLE						DRAWING NUMBER			REV.	
DC 2.0mm Field Installable Cable End Plug Screw						GT1B2202			01	
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET	
	B	1:1	Viola 03/05/18	Lucas 03/05/18	Ray 03/05/18	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm	1/1	

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT Contact CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:

(a) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE

(b) NOT TO REPRODUCE OR COPY IT

(c) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART

(d) ALL RIGHTS RESERVED

1

2

3

4