





Notes: (Unless Otherwise Specified)

1. Waterproof Rate: IP68.
2. Recommend Panel Thickness: 0.8 to 6.0 mm.
3. Recommend Torque: 19~20 Kgf-cm.
4. Mating Cap P/N: GT2C2150X2/GT1C5331X2.
5. RoHS & REACH Compliant.


REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A0			Jenny 05/10/22	Lucas 05/10/22	Ray 05/10/22





Recommend Panel Cut-Out

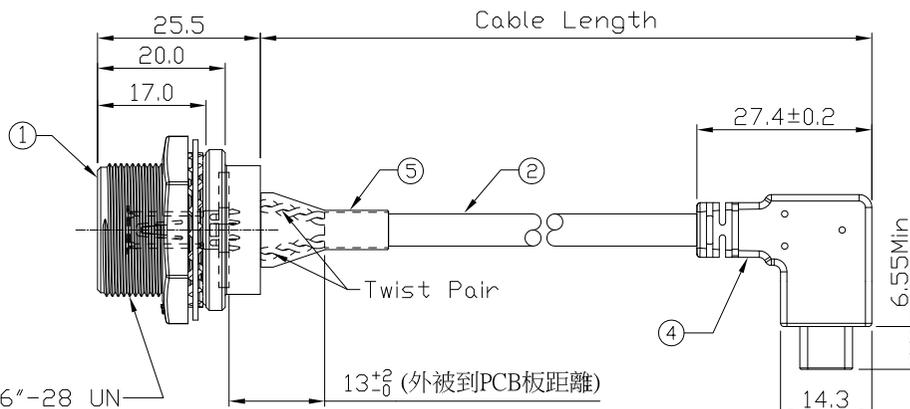

(A1,A12 is on this side)



Type C Plug

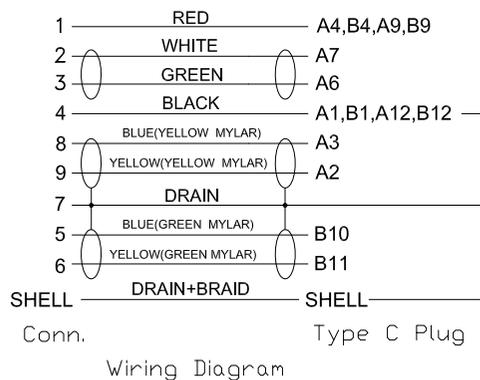

Item	Part Name	Material / Finish	Q'ty
5	Shrink Tube	L=25mm, Heat Shrink Tube With Adhesive Lined Color: Black	1
4	Over Mold	PVC Color: Black	1
3	USB Type C 3.1 Plug	Housing: Thermoplastic, Color: Black Contacts: Copper Alloy, Finish: Au Plated Shell: Stainless Steel, Finish: Au Plated	1
2	Cable	UL2725 (1P/30#+EAM)*2+(1P/30#)+(2C/24#)+AEB(AL)65% Color: Black, DD=5.0mm PVC JACKET.	1
1	USB-A 3.0 C3 Panel Jack	GT Contact P/N: GT218300-01-XX	1

Part No.	Cable Length	Tol.
GT218300-0D-02	2000 mm	+100
GT218300-0D-01	1000 mm	+50
GT218300-0D-29	900 mm	+50
GT218300-0D-28	800 mm	+50
GT218300-0D-27	700 mm	+50
GT218300-0D-26	600 mm	+50
GT218300-0D-25	500 mm	+50
GT218300-0D-24	400 mm	+50
GT218300-0D-23	300 mm	+25
GT218300-0D-22	200 mm	+25
GT218300-0D-21	100 mm	+25

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT CONTACT CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:  
 (A) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE  
 (B) NOT TO REPRODUCE OR COPY IT  
 (C) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART  
 (D) ALL RIGHTS RESERVED

TITLE						DRAWING NUMBER			REV.
USB-A 3.0 Metal C3 Panel Jack Screw With Type C Plug Right Angle Right/Left						GT218300-0D-XX			A0
DD NOT SCALE DRAWINGS	B	1:1	Jenny 05/10/22	Lucas 05/10/22	Ray 05/10/22	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm	1/1
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET