



Notes: (Unless Otherwise Specified)  
 1. Waterproof Rate: IP68.  
 2. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A1	ECN-221105	Modify 54±1.0mm → 55.4±1.0mm	Jenny 11/15/22	Lucas 11/15/22	Ray 11/15/22

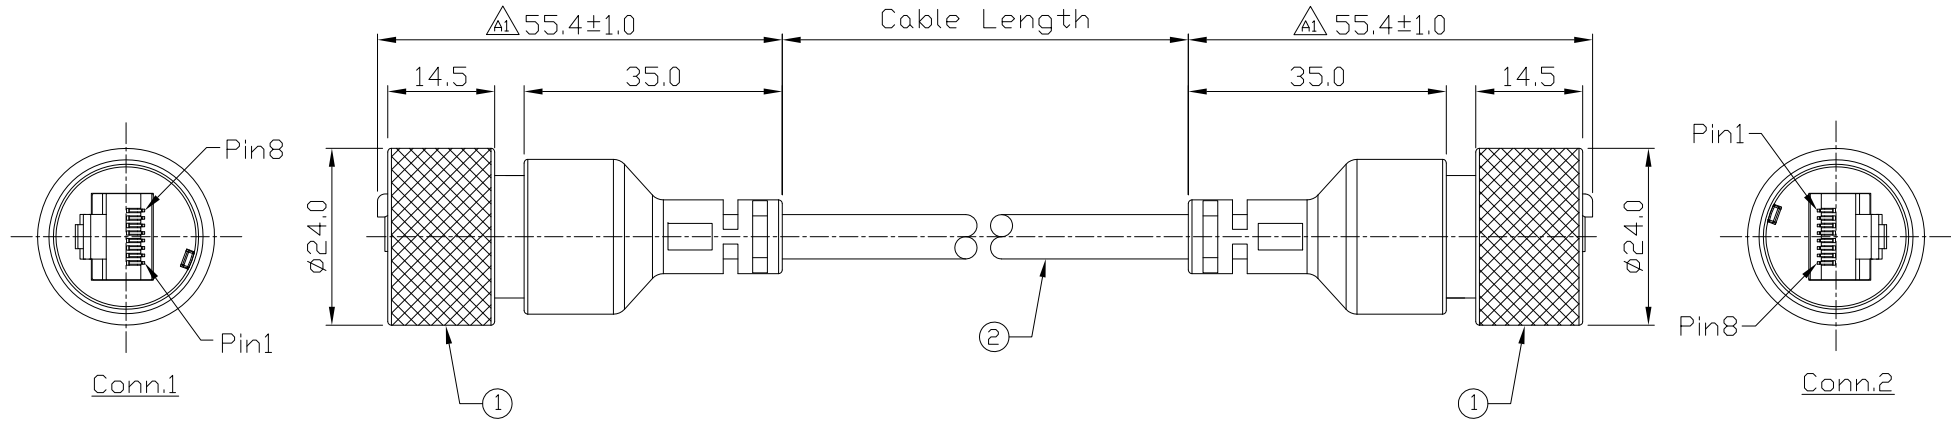

GTC  
 DOC.CENTER.ISSUE  
 NOV.16.2022  
 ONLY FOR  
 RELEASE

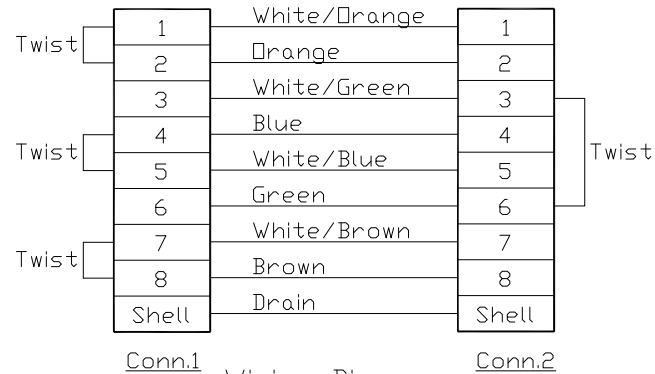

GT225320-07-20	20000 mm	+1000
GT225320-07-15	15000 mm	+750
GT225320-07-10	10000 mm	+500
GT225320-07-09	9000 mm	+450
GT225320-07-08	8000 mm	+400
GT225320-07-07	7000 mm	+150
GT225320-07-06	6000 mm	+150
GT225320-07-05	5000 mm	+150
GT225320-07-04	4000 mm	+150
GT225320-07-03	3000 mm	+100
GT225320-07-02	2000 mm	+100
GT225320-07-01	1000 mm	+50
GT225320-07-29	900 mm	+50
GT225320-07-28	800 mm	+50
GT225320-07-27	700 mm	+50
GT225320-07-26	600 mm	+50
GT225320-07-25	500 mm	+50
GT225320-07-24	400 mm	+50
GT225320-07-23	300 mm	+25
GT225320-07-22	200 mm	+25
Part No.	Cable Length	Tol.

2	CAT5E FTP Cable	UL2835 24AWG*4P+AL/My+D Color: Black, OD=6.0mm	1
1	RJ45 Metal C3 Shielded Cable End Plug Screw	GT Contact P/N: GT225320-02-XX	2
Item	Part Name	Material / Finish	QTY

TITLE						DRAWING NUMBER			REV.
RJ45 Metal C3 Shielded Cable End Plug Screw Twin-Head With Cable						GT225320-07-XX			A1
	B	1:1	Viola 03/01/18	Lucas 03/01/18	Ray 03/01/18	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm	1/1
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:  
 THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT Contact CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:  
 (a) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE  
 (b) NOT TO REPRODUCE OR COPY IT  
 (c) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART  
 (d) ALL RIGHTS RESERVED