



Notes: (Unless Otherwise Specified)

1. Waterproof Rate: IP68.
2. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
02	ECN-221105	Modify 54±1.0mm → 55.4±1.0mm	Jenny 11/15/22	Lucas 11/15/22	Ray 11/15/22

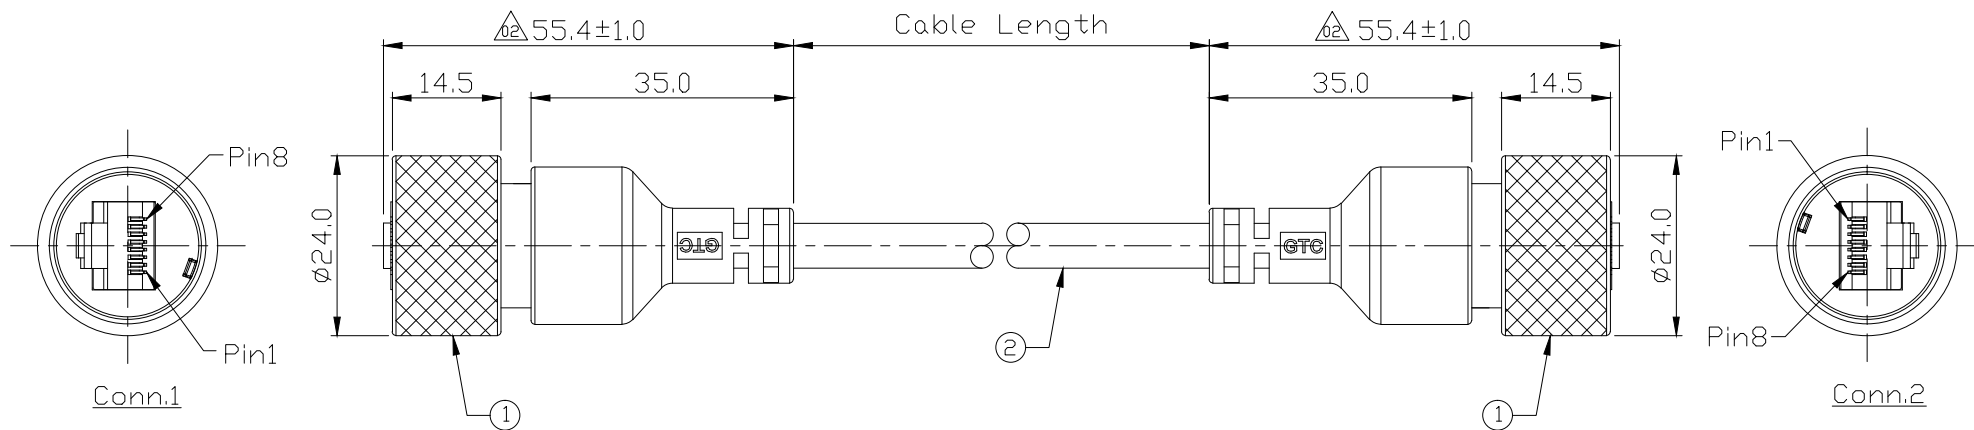

GT225320-0K-20	20000 mm	+1000
GT225320-0K-15	15000 mm	+750
GT225320-0K-10	10000 mm	+500
GT225320-0K-09	9000 mm	+450
GT225320-0K-08	8000 mm	+400
GT225320-0K-07	7000 mm	+150
GT225320-0K-06	6000 mm	+150
GT225320-0K-05	5000 mm	+150
GT225320-0K-04	4000 mm	+150
GT225320-0K-03	3000 mm	+100
GT225320-0K-02	2000 mm	+100
GT225320-0K-01	1000 mm	+50
GT225320-0K-Z9	900 mm	+50
GT225320-0K-Z8	800 mm	+50
GT225320-0K-Z7	700 mm	+50
GT225320-0K-Z6	600 mm	+50
GT225320-0K-Z5	500 mm	+50
GT225320-0K-Z4	400 mm	+50
GT225320-0K-Z3	300 mm	+25
GT225320-0K-Z2	200 mm	+25
Part No.	Cable Length	Tol.

2	Cable	CAT6E 26AWG*4P+Al/My+D Color: Black, OD=6.0mm	1
1	RJ45 Metal C3 Shielded Cable End Plug Screw	GT Contact P/N: GT225320-0X-XX	2
Item	Part Name	Material / Finish	QTY

Conn.1 Wiring Diagram Conn.2

**GT Contact CO.,LTD**

NOTICE OF PROPRIETARY PROPERTY:  
 THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT Contact CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:  
 (i) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE  
 (ii) NOT TO REPRODUCE OR COPY IT  
 (iii) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART  
 (iv) ALL RIGHTS RESERVED

TITLE				DRAWING NUMBER				REV.	
RJ45 Metal C3 Shielded Cable End Plug Screw Twin-Head With CAT6 Cable				GT225320-0K-XX				02	
	B	1:1	Jenny 02/25/22	Lucas 02/25/22	Ray 02/25/22	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm	1/1
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET