
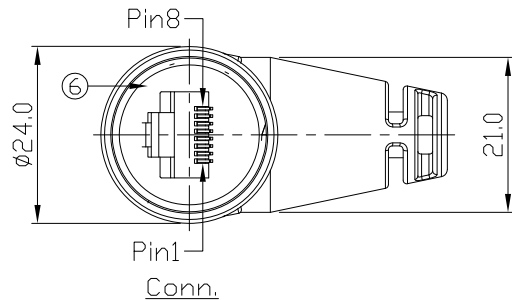


Notes: (Unless Otherwise Specified)

1. Waterproof Rate: IP68.
2. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A0			Aileen 06/01/23	Hank 06/01/23	Lucas 06/01/23

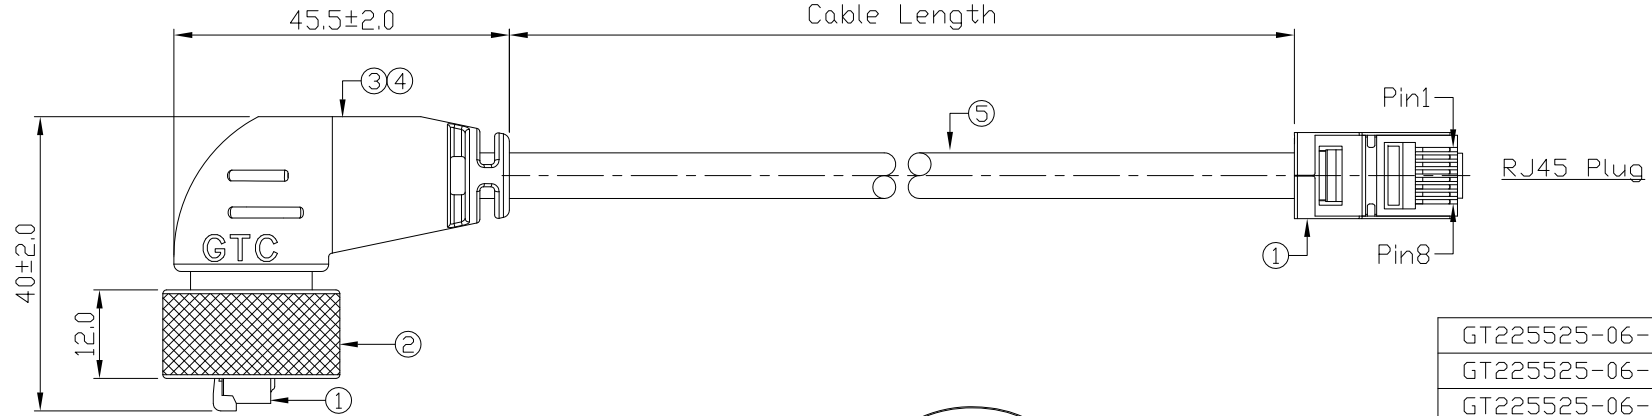

GTC
DOC.CENTER.ISSUE
MAY.28.2024
ONLY FOR
RELEASE



GT225525-06-20	20000 mm	+1000
GT225525-06-10	10000 mm	+500
GT225525-06-09	9000 mm	+450
GT225525-06-08	8000 mm	+400
GT225525-06-07	7000 mm	+150
GT225525-06-06	6000 mm	+150
GT225525-06-05	5000 mm	+150
GT225525-06-04	4000 mm	+150
GT225525-06-03	3000 mm	+100
GT225525-06-02	2000 mm	+100
GT225525-06-01	1000 mm	+50
GT225525-06-Z9	900 mm	+50
GT225525-06-Z8	800 mm	+50
GT225525-06-Z7	700 mm	+50
GT225525-06-Z6	600 mm	+50
GT225525-06-Z5	500 mm	+50
GT225525-06-Z4	400 mm	+50
GT225525-06-Z3	300 mm	+25
GT225525-06-Z2	200 mm	+25
Part No.	Cable Length	Tol.

6	Rubber Pad	Silicone Color: Black	1
5	Cable	CAT5E 24AWG*4P+AL/My+D Color: Black, DD=6.0mm	1
4	Over Mold	PVC Color: Black	1
3	Inner Mold	Thermoplastic Color: Black	1
2	Screw Nut	Copper Alloy Finish: Ni Plated	1
1	RJ45 Plug	Housing: Thermoplastic; Color: Clean Contacts: Copper Alloy; Finish: Au Plated Shell: Cold Roll Steel; Finish: Ni Plated	2
Item	Part Name	Material / Finish	Q'ty

TITLE						DRAWING NUMBER			REV.	
RJ45 Metal C3 Shielded Cable End Plug Screw 90° With RJ45 Plug						GT225525-06-XX			A0	
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES	UNIT	SHEET		
	B	1/1	Aileen 06/01/23	Hank 06/01/23	Lucas 06/01/23	X.X ± 0.5 X.XX ± 0.2	mm	1/1		

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT Contact CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:
(1) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
(2) NOT TO REPRODUCE OR COPY IT
(3) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
(4) ALL RIGHTS RESERVED