

1

2


3

4

Notes: (Unless Otherwise Specified)

- 1. Waterproof Rate: IP68.
- 2. Durability: 100 Cycles Min.
- 3. DWV: 650 Vrms.
- 4. Rated Voltage: 60V AC/DC.
- 5. Insulation Resistance: 100 MΩ Min.
- 6. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A1	ECN-141102	Modify Drawing Number GT2321J4-03041-XX → GT2321J4-23041-XX	Joyce 01/21/15	Lucas 01/21/15	Ray 01/21/15

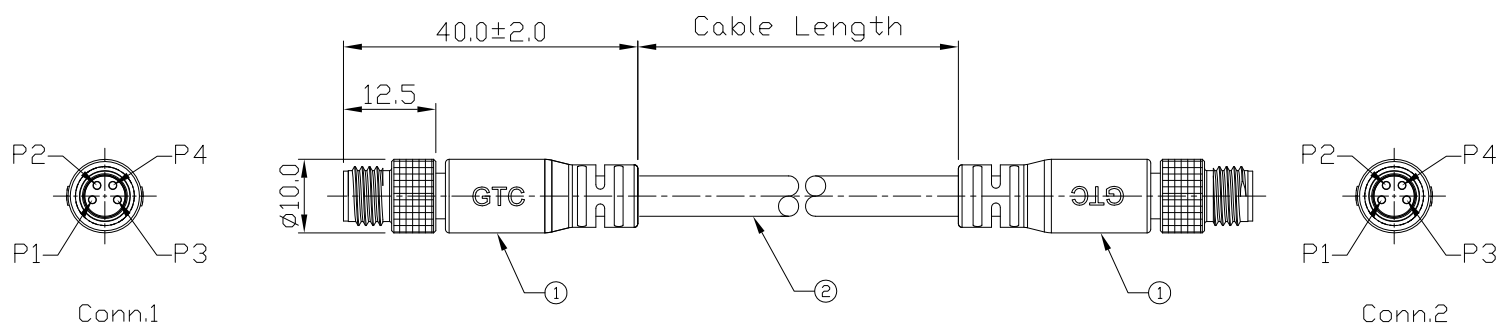

1	Black	1
2	Brown	2
3	Red	3
4	Orange	4

Wiring Diagram

GT2321J4-23041-10	10000 mm	±500
GT2321J4-23041-09	9000 mm	±450
GT2321J4-23041-08	8000 mm	±400
GT2321J4-23041-07	7000 mm	±150
GT2321J4-23041-06	6000 mm	±150
GT2321J4-23041-05	5000 mm	±150
GT2321J4-23041-04	4000 mm	±150
GT2321J4-23041-03	3000 mm	±150
GT2321J4-23041-02	2000 mm	±100
GT2321J4-23041-01	1000 mm	±50
GT2321J4-23041-Z9	900 mm	±40
GT2321J4-23041-Z8	800 mm	±40
GT2321J4-23041-Z7	700 mm	±40
GT2321J4-23041-Z6	600 mm	±40
GT2321J4-23041-Z5	500 mm	±40
GT2321J4-23041-Z4	400 mm	±20
GT2321J4-23041-Z3	300 mm	±20
Part No.	Cable Length	Tol.

2	Cable	UL2464 22AWG*4C+Jacket (UV) OD=5.0mm, Color: Black	1
1	GT Contcat	M8 A-Coding 3A 4P Cable End Male GT232134-2304X, Color: Black	2
Item	Part Name	Material / Finish	Q'ty

TITLE M8 A-Coding 3A 4P Cable End Twin-head Male						DRAWING NUMBER GT2321J4-23041-XX			REV. A1	
	B	1:1	Edwin 05/24/13	Ray 05/24/13	Ray 05/24/13	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm	1/1	
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET	

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT Contact CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:

(i) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
(ii) NOT TO REPRODUCE OR COPY IT
(iii) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
(iv) ALL RIGHTS RESERVED

1

2

3

4