
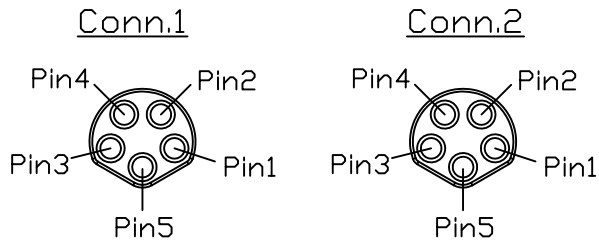


Notes: (Unless Otherwise Specified)

1. Waterproof Rate: IP68.
2. Durability: 100 Cycles Min.
3. DWV: 650 Vrms.
4. Rated Voltage: 30V AC/DC.
5. Insulation Resistance: 100 MΩ Min.
6. RoHS & REACH Compliant.

GTC
DOC.CENTER.ISSUE
OCT.06.2016
ONLY FOR
RELEASE

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A0		Mass Production	Hank 10/05/16	Lucas 10/05/16	Ray 10/05/16

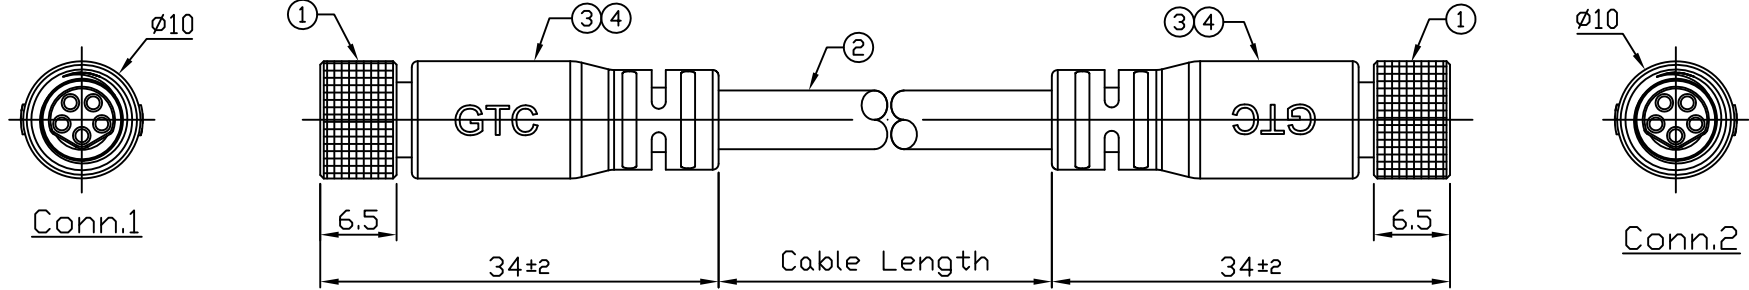

Pin Assignment

GT2322K4-23051-10	10000mm	+500
GT2322K4-23051-09	9000mm	+450
GT2322K4-23051-08	8000mm	+400
GT2322K4-23051-07	7000mm	+150
GT2322K4-23051-06	6000mm	+150
GT2322K4-23051-05	5000mm	+150
GT2322K4-23051-04	4000mm	+150
GT2322K4-23051-03	3000mm	+100
GT2322K4-23051-02	2000mm	+100
GT2322K4-23051-01	1000mm	+50
GT2322K4-23051-Z9	900mm	+50
GT2322K4-23051-Z8	800mm	+50
GT2322K4-23051-Z7	700mm	+50
GT2322K4-23051-Z6	600mm	+50
GT2322K4-23051-Z5	500mm	+50
GT2322K4-23051-Z4	400mm	+50
GT2322K4-23051-Z3	300mm	+25
GT2322K4-23051-Z2	200mm	+25
Part No.	Cable Length	Tol.

4	Over Mold	PVC Color: Black	2
3	Inner Mold	Thermoplastic Color: White or Black	2
2	Cable	UL2464 22AWG*5C+Talc(UV) OD=5.5±0.2mm, PVC, Color: Black	1
1	M8 B-Coding 3A 5P Female	GT Contact P/N: GT232224-2305X	2
Item	Part Name	Material / Finish	Q'ty

Conn.1		Conn.2
1	Black	1
2	Orange	2
3	Brown	3
4	Red	4
5	Yellow	5

Wiring Diagram

TITLE						DRAWING NUMBER			REV.	
M8 B-Coding 3A 5P Cable End Female Twin-Head With Cable						GT2322K4-23051-XX			A0	
	B	1:1	Hank 10/05/16	Lucas 10/05/16	Ray 10/05/16	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm	1/1	
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET	

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT Contact CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:
① TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
② NOT TO REPRODUCE OR COPY IT
③ NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
④ ALL RIGHTS RESERVED