

1

2


3

4


Note:

- 1. Waterproof Rate: IP68.
- 2. Durability: 100 Cycles Min.
- 3. DWV: 650 Vrms.
- 4. Rated Voltage: 30V AC/DC.
- 5. Insulation Resistance: 100 MΩ Min.
- 6. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A1	ECN-241008	Added Inner Mold	Joyce 11/04/24	Hank 11/04/24	Lucas 11/04/24

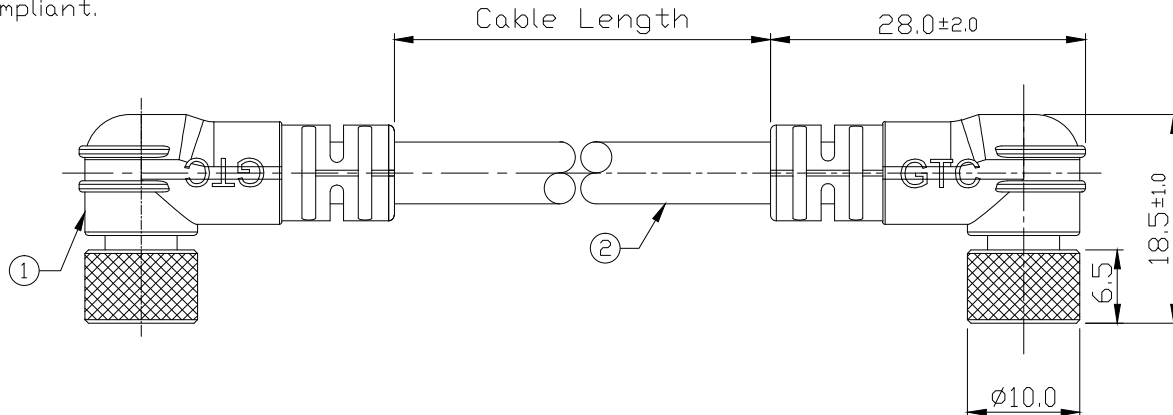

GTC
DOC.CENTER.ISSUE
NOV.06.2024
ONLY FOR
RELEASE

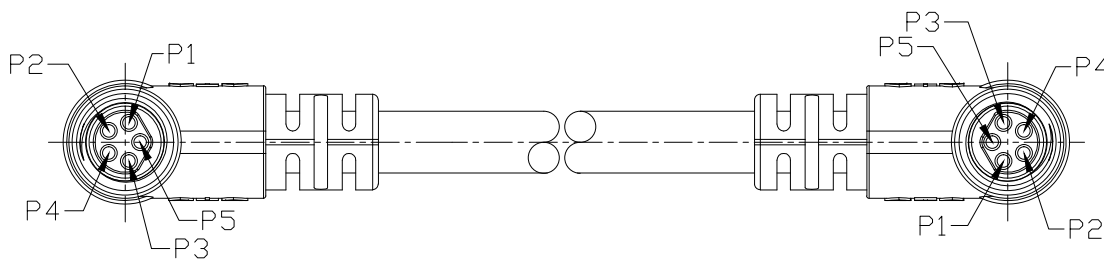

1	Black	1
2	Orange	2
3	Brown	3
4	Red	4
5	Yellow	5

Wiring Diagram

GT2322K5-23051-10	10000 mm	+500
GT2322K5-23051-09	9000 mm	+450
GT2322K5-23051-08	8000 mm	+400
GT2322K5-23051-07	7000 mm	+150
GT2322K5-23051-06	6000 mm	+150
GT2322K5-23051-05	5000 mm	+150
GT2322K5-23051-04	4000 mm	+150
GT2322K5-23051-03	3000 mm	+100
GT2322K5-23051-02	2000 mm	+100
GT2322K5-23051-01	1000 mm	+50
GT2322K5-23051-29	900 mm	+50
GT2322K5-23051-28	800 mm	+50
GT2322K5-23051-27	700 mm	+50
GT2322K5-23051-26	600 mm	+50
GT2322K5-23051-25	500 mm	+50
GT2322K5-23051-24	400 mm	+50
GT2322K5-23051-23	300 mm	+25
GT2322K5-23051-22	200 mm	+25
GT2322K5-23051-21	100 mm	+25
Part No.	Cable Length	Tol.

2	Cable	UL2464 22AWG*5C+Talc(UV) Color: Black, OD=5.5±0.2mm	1
1	M8 B-Coding 3A 5P Cable End 90° Female	GT Contact P/N: GT232225-23051-XX	2
Item	Part Name	Material / Finish	Q'ty

TITLE				DRAWING NUMBER				REV.	
M8 B-Coding 3A 5P Cable End 90° Female Twin-Head With Cable				GT2322K5-23051-XX				A1	
	B	1.5:1	Viola 04/16/18	Lucas 04/16/18	Ray 04/16/18	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm	1/1
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT Contact CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:

- (i) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
- (ii) NOT TO REPRODUCE OR COPY IT
- (iii) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
- (iv) ALL RIGHTS RESERVED

1

2

3

4