


Notes: (Unless Otherwise Specified)


1. WaterProof Rate: IP68
2. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
01			Hank 05/29/20	Lucas 05/29/20	Ray 05/29/20

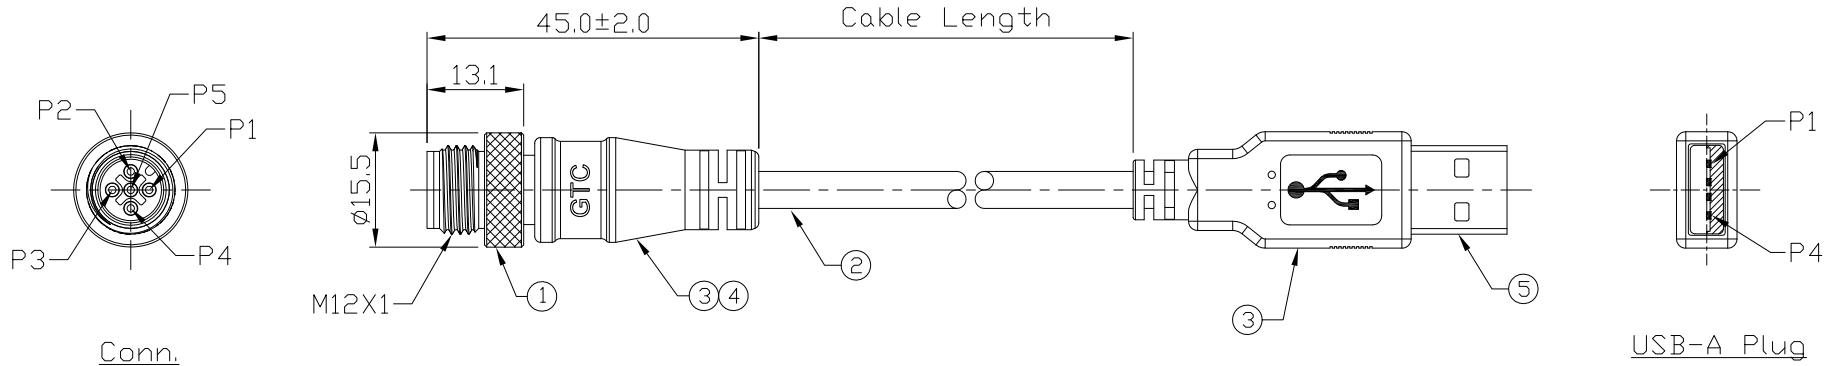

GTC
DOC.CENTER.ISSUE
JUN.01.2020
ONLY FOR
RELEASE

GT234134-2205B-10	10000mm	+500
GT234134-2205B-09	9000mm	+450
GT234134-2205B-08	8000mm	+400
GT234134-2205B-07	7000mm	+150
GT234134-2205B-06	6000mm	+150
GT234134-2205B-05	5000mm	+150
GT234134-2205B-04	4000mm	+150
GT234134-2205B-03	3000mm	+100
GT234134-2205B-02	2000mm	+100
GT234134-2205B-01	1000mm	+50
GT234134-2205B-Z9	900mm	+50
GT234134-2205B-Z8	800mm	+50
GT234134-2205B-Z7	700mm	+50
GT234134-2205B-Z6	600mm	+50
GT234134-2205B-Z5	500mm	+50
GT234134-2205B-Z4	400mm	+50
GT234134-2205B-Z3	300mm	+25
GT234134-2205B-Z2	200mm	+25
Part No.	Cable Length	Tol.

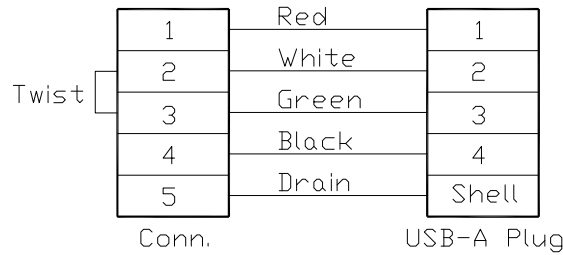

Item	Part Name	Material / Finish	Q'ty
5	USB-A Plug	Housing: Thermoplastic, Color: Black Contacts: Copper Alloy, Finish: Au Plated Shell: Cold Roll Steel, Finish: Ni Plated	1
4	Inner Mold	Thermoplastic Color: White Or Black	1
3	Over Mold	PVC Color: Black	2
2	Cable	UL2725 1P*24AWG+2C*24AWG+Al/My+D+B Color: Black, OD=5.0mm	1
1	M12 A-Coding 4A 5P Cable End Male	GT Contact P/N: GT234134-2205X-XX	1

Wiring Diagram

TITLE						DRAWING NUMBER			REV.
M12 A-Coding 4A 5P Cable End Male With Cable + USB-A Plug						GT234134-2205B-XX			01
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		SHEET	
	B	1:1	Hank 05/29/20	Lucas 05/29/20	Ray 05/29/20	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm 1/1	

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT Contact CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:

(A) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
(B) NOT TO REPRODUCE OR COPY IT
(C) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
(D) ALL RIGHTS RESERVED