

1

2


3

4


Notes: (Unless Otherwise Specified)

1. Waterproof Rate: IP68.
2. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
01			Aileen 12/09/21	Lucas 12/09/21	Ray 12/09/21

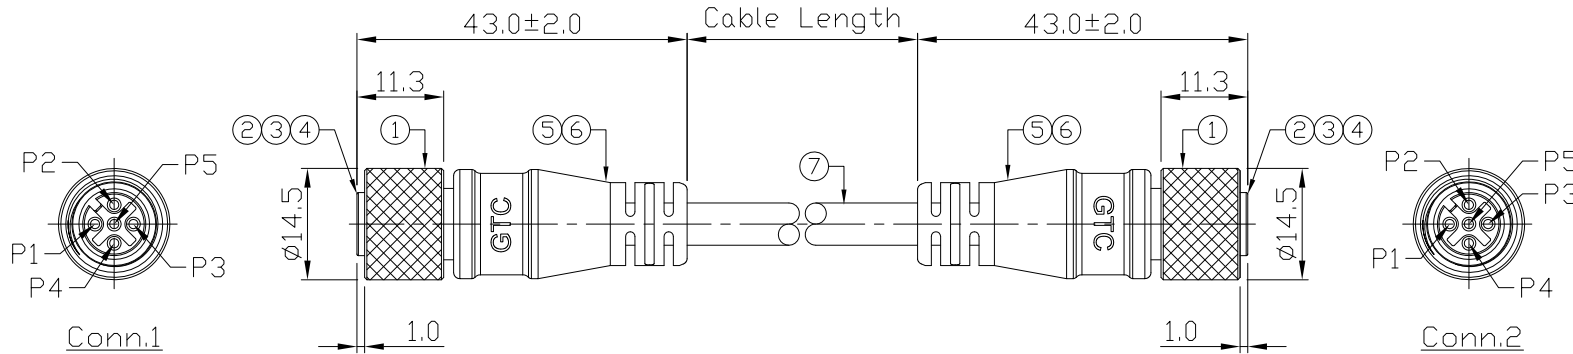

GT2341K4-22051-10	10000 mm	+500
GT2341K4-22051-09	9000 mm	+450
GT2341K4-22051-08	8000 mm	+400
GT2341K4-22051-07	7000 mm	+150
GT2341K4-22051-06	6000 mm	+150
GT2341K4-22051-05	5000 mm	+150
GT2341K4-22051-04	4000 mm	+150
GT2341K4-22051-03	3000 mm	+100
GT2341K4-22051-02	2000 mm	+100
GT2341K4-22051-01	1000 mm	+50
GT2341K4-22051-Z9	900 mm	+50
GT2341K4-22051-Z8	800 mm	+50
GT2341K4-22051-Z7	700 mm	+50
GT2341K4-22051-Z6	600 mm	+50
GT2341K4-22051-Z5	500 mm	+50
GT2341K4-22051-Z4	400 mm	+50
GT2341K4-22051-Z3	300 mm	+25
GT2341K4-22051-Z2	200 mm	+25

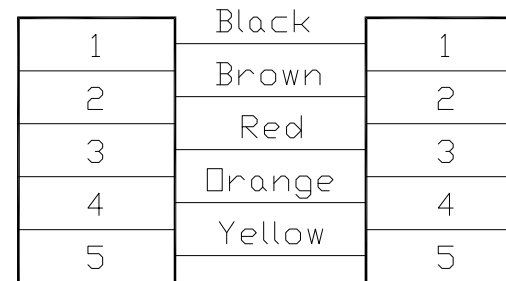

Wiring Diagram

7	Cable	UL2464 22AWG*5C+Talc (UV) Color: Black, OD=5.5mm	1
6	Over Mold	PVC Color: Black	2
5	Inner Mold	Thermoplastic Color: Black Or White	2
4	O-Ring	Silicone Color: Red	2
3	Contacts	Copper Alloy Finish: Au Plated	10
2	Housing	Thermoplastic Color: Black	2
1	Screw Nut	Copper Alloy Finish: Ni Plated	2
Item	Part Name	Material / Finish	Q'ty

Part No.	Cable Length	Tol.
----------	--------------	------

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT Contact CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:
 (1) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
 (2) NOT TO REPRODUCE OR COPY IT
 (3) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
 (4) ALL RIGHTS RESERVED

TITLE						DRAWING NUMBER			REV.	
Dual M12 A Coding 4A 5P Female Cable						GT2341K4-22051-XX			01	
	B	1:1	Aileen 12/09/21	Lucas 12/09/21	Ray 12/09/21	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm	1/1	
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET	

1

2

3

4