


Notes: (Unless Otherwise Specified)

1. Waterproof Rate: IP68.
2. Durability: 100 Cycles Min.
3. DWV: 500 Vrms.
4. Rated Voltage: 30V AC/DC.
5. Insulation Resistance: 100 MΩ MIN.
6. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A0			Jenny 07/15/22	Lucas 07/15/22	Ray 07/15/22

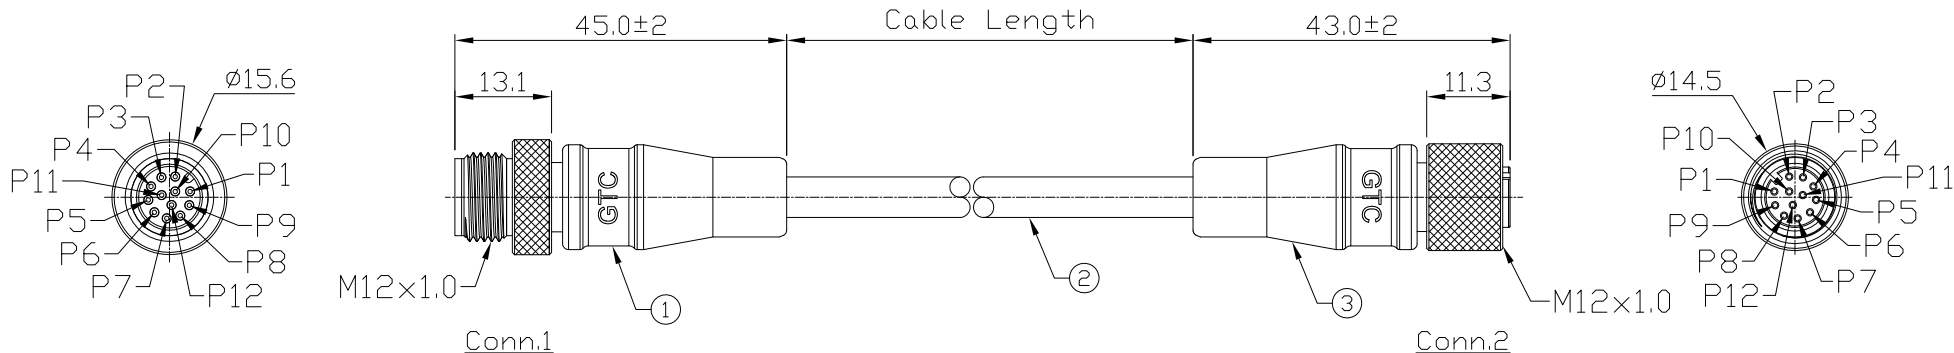

1	Black	1
2	Brown	2
3	Red	3
4	Orange	4
5	Yellow	5
6	Green	6
7	Blue	7
8	Purple	8
9	Gray	9
10	White	10
11	Pink	11
12	Light Green	12

Conn.1 Drain Conn.2

Wiring Diagram

GT2341L4-04121-10	10000 mm	+500
GT2341L4-04121-09	9000 mm	+450
GT2341L4-04121-08	8000 mm	+400
GT2341L4-04121-07	7000 mm	+150
GT2341L4-04121-06	6000 mm	+150
GT2341L4-04121-05	5000 mm	+150
GT2341L4-04121-04	4000 mm	+150
GT2341L4-04121-03	3000 mm	+100
GT2341L4-04121-02	2000 mm	+100
GT2341L4-04121-01	1000 mm	+50
GT2341L4-04121-Z9	900 mm	+50
GT2341L4-04121-Z8	800 mm	+50
GT2341L4-04121-Z7	700 mm	+50
GT2341L4-04121-Z6	600 mm	+50
GT2341L4-04121-Z5	500 mm	+50
GT2341L4-04121-Z4	400 mm	+50
GT2341L4-04121-Z3	300 mm	+25

Part No. Cable Length Tol.

Item	Part Name	Material / Finish	Qty
3	M12 1.5A 12P Female	GTC Connector P/N: GT234124-04121-XX	1
2	Cable	UL2464 26AWG*12C+Al/My+D DD=6.0mm, Color: Black	1
1	M12 1.5A 12P Male	GTC Connector P/N: GT234134-04121-XX	1

TITLE: M12 A-Coding 1.5A 12P Cable End Twin-head Female / Male

DRAWING NUMBER: GT2341L4-04121-XX

REV. A0

THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES	UNIT	SHEET
THIRD ANGLE PROJECTION	B	1:1	Jenny 07/15/22	Lucas 07/15/22	Ray 07/15/22	X.X ± 0.5 X.XX ± 0.2	mm	1/1

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT CONTACT CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:
(a) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
(b) NOT TO REPRODUCE OR COPY IT
(c) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
(d) ALL RIGHTS RESERVED