


REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A0		Mass Production	Joyce 04/12/12	Lucas 04/12/12	Roy 04/12/12

- Notes: (Unless Otherwise Specified)
1. Waterproof Rate: IP68.
 2. Durability: 100 Cycles Min.
 3. DWV: 1000 Vrms
 4. Rated Voltage: 60V AC/DC
 5. Insulation Resistance: 100 MΩ Min.
 6. RoHS Compliant.

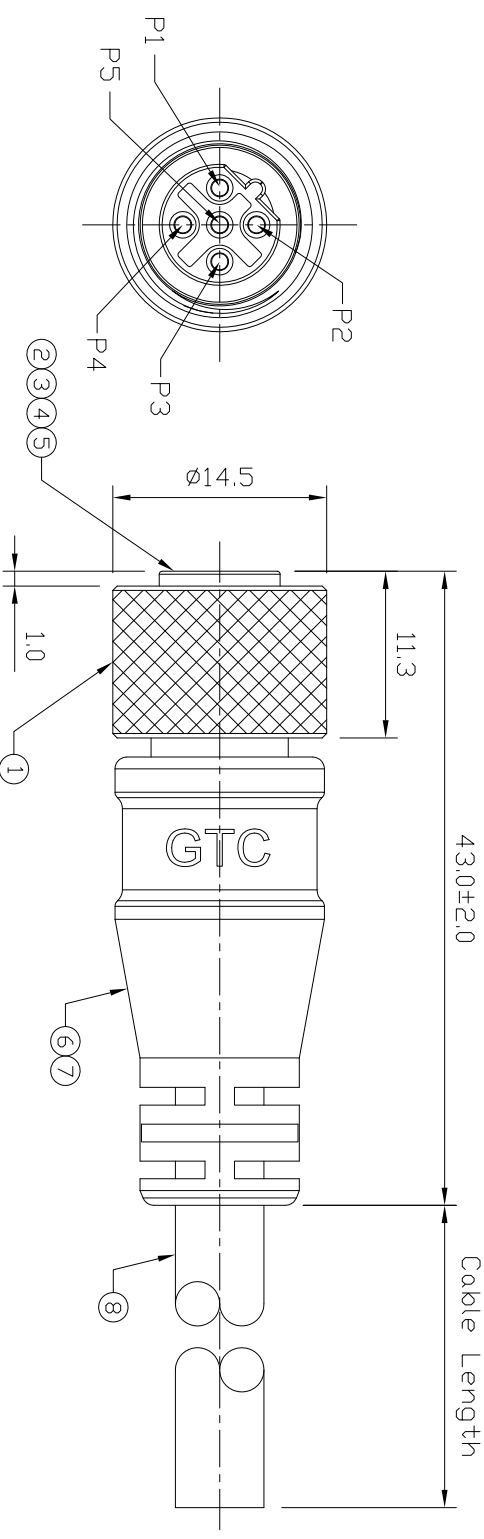

Item	Part Name	Material / Finish	Qty
8	Cable	UL2464 22AWG*5C Color: Black, DD=5.5mm	1
7	Dyer Mold	PVC Color: Black	1
6	Inner Mold	Thermoplastic Color: White Dp-Black	1
5	D-Ring	Silicone Color: Red	1
4	Base	Thermoplastic Color: Black	1
3	Contacts	Copper Alloy Finish: Au Plating	5
2	Housing	Thermoplastic Color: Black	1
1	Screw Nut	Copper Alloy Finish: Ni Plated	1

1	Brown
2	Orange
3	Black
4	Yellow
5	Red

Wiring Diagram

M12 B-Coding 4A 5P Cable End Female

TITLE	DRAWING NUMBER	REV.
M12 B-Coding 4A 5P Cable End Female	GT234224-22051-XX	A0

DD NOT SCALE DRAWINGS	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES	UNIT	SHEET
B	1:1	Joyce 04/12/12	Lucas 04/12/12	Roy 04/12/12	± 0.5 ANGLES ± 1°	mm	1/1

GT Contact CD,LTID

NOTICE OF PROPRIETARY PROPERTY
 THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT Contact CD,LTID THE POSSESSOR ADDRESS TO THE FOLLOWING
 TO MAINTAIN THIS AGREEMENT IN CONFIDENCE
 DO NOT TO REPRODUCE, PUBLISH IT IN WHOLE OR PART
 (C) ALL RIGHTS RESERVED