

1

2



3

4

Notes: (Unless Otherwise Specified)

- 1. Waterproof Rate: IP68.
- 2. Durability: 100 Cycles Min.
- 3. DWV: 650 Vrms.
- 4. Rated Voltage: 30V AC/DC.
- 5. Insulation Resistance: 100 MΩ Min.
- 6. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
01			Hank 08/10/16	Lucas 08/10/16	Ray 08/10/16

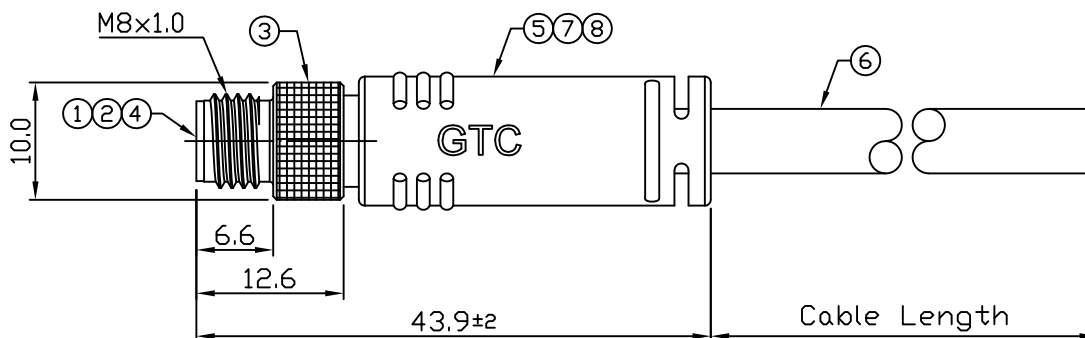

GTC
R&D DEPT. ISSUE
AUG.12.2016
ONLY FOR
RELEASE

8	Glue	Epoxy Color: Black	
7	Over Mold	PVC Color: Black	1
6	Cable	UL2464 22AWG*4C+Al/My+D+Braid OD=6.0±0.2mm, PVC, Color: Black	1
5	Metal Shielded Bush	Copper Alloy Finish: Ni Plated	1
4	Bush	Copper Alloy Finish: Sn Plated	1
3	Screw Nut	Copper Alloy Finish: Ni Plated	1
2	Contacts	Copper Alloy Finish: Au Plated	4
1	Housing	Thermoplastic Color: Black	1
Item	Part Name	Material / Finish	Q'ty

1	Black
2	Brown
3	Red
4	Orange
Shell	Drain+Braid

Wiring Diagram

GT23B134-23041-10	10000mm	+500
GT23B134-23041-09	9000mm	+450
GT23B134-23041-08	8000mm	+400
GT23B134-23041-07	7000mm	+150
GT23B134-23041-06	6000mm	+150
GT23B134-23041-05	5000mm	+150
GT23B134-23041-04	4000mm	+150
GT23B134-23041-03	3000mm	+100
GT23B134-23041-02	2000mm	+100
GT23B134-23041-01	1000mm	+50
GT23B134-23041-Z9	900mm	+50
GT23B134-23041-Z8	800mm	+50
GT23B134-23041-Z7	700mm	+50
GT23B134-23041-Z6	600mm	+50
GT23B134-23041-Z5	500mm	+50
GT23B134-23041-Z4	400mm	+50
GT23B134-23041-Z3	300mm	+25
GT23B134-23041-Z2	200mm	+25
Part No.	Cable Length	Tol.

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT Contact CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:
 (1) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
 (2) NOT TO REPRODUCE OR COPY IT
 (3) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
 (4) ALL RIGHTS RESERVED

TITLE						DRAWING NUMBER			REV.	
M8 A-Coding 3A 4P Male Shielded Cable End With Cable						GT23B134-23041-XX			01	
	B	1:1	Hank 08/10/16	Lucas 08/10/16	Ray 08/10/16	X.X ± 0.3 X.XX ± 0.1	X.XXX ± 0.05 ANGLES ± 1°	mm	1/1	
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET	

1

2

3

4