

1

2


3

4

Notes: (Unless Otherwise Specified)

- 1. Waterproof Rate: IP68.
- 2. Durability: 100 Cycles Min.
- 3. DWV: 1000 Vrms.
- 4. Rated Voltage: 60V AC/DC.
- 5. Insulation Resistance: 100 MΩ Min.
- 6. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
01			Hank 07/27/22	Lucas 07/27/22	Ray 07/27/22

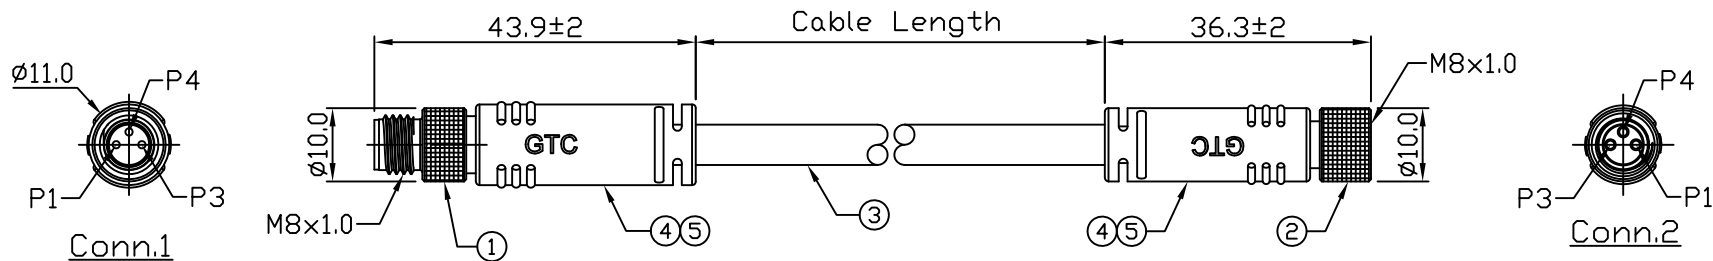

GT23B1L4-23031-10	10000mm	+500
GT23B1L4-23031-09	9000mm	+450
GT23B1L4-23031-08	8000mm	+400
GT23B1L4-23031-07	7000mm	+150
GT23B1L4-23031-06	6000mm	+150
GT23B1L4-23031-05	5000mm	+150
GT23B1L4-23031-04	4000mm	+150
GT23B1L4-23031-03	3000mm	+100
GT23B1L4-23031-02	2000mm	+100
GT23B1L4-23031-01	1000mm	+50
GT23B1L4-23031-Z9	900mm	+50
GT23B1L4-23031-Z8	800mm	+50
GT23B1L4-23031-Z7	700mm	+50
GT23B1L4-23031-Z6	600mm	+50
GT23B1L4-23031-Z5	500mm	+50
GT23B1L4-23031-Z4	400mm	+50
GT23B1L4-23031-Z3	300mm	+25
GT23B1L4-23031-Z2	200mm	+25
Part No.	Cable Length	Tol.

5	Glue	Epoxy Color: Black	
4	Over Mold	PVC Color: Black	2
3	Cable	UL2464 22AWG*3C+AEB 85% OD=5.5mm, PVC, Color: Black	1
2	M8 A-Coding 3A 3P Female Shielded Cable End	GT Contact P/N: GT23B124-23031-XX	1
1	M8 A-Coding 3A 3P Male Shielded Cable End	GT Contact P/N: GT23B134-23031-XX	1
Item	Part Name	Material / Finish	Q'ty



Wiring Diagram

TITLE M8 A-Coding 3A 3P Male Shielded Cable End Twin-head Male / Female With Cable						DRAWING NUMBER GT23B1L4-23031-XX			REV. 01	
	B	1:1	Hank 07/27/22	Lucas 07/27/22	Ray 07/27/22	X.X ± 0.3 X.XX ± 0.1	X.XXX ± 0.05 ANGLES ± 1°	mm	1/1	
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET	

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:
 THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT Contact CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:
 (1) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
 (2) NOT TO REPRODUCE OR COPY IT
 (3) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
 (4) ALL RIGHTS RESERVED

1

2

3

4