


Notes: (Unless Otherwise Specified)

- 1. Water Proof Rate: IP68.
- 2. Durability: 100 Cycles Min.
- 3. DWV: 1000 Vrms
- 4. Insulation Resistance: 100 MΩ Min.
- 5. RoHS Compliant

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A0		Mass Production	Joyce 04/27/15	Lucas 04/27/15	Ray 04/27/15
A1	ECN-151113	Inner Mold Changed PVC 30P	Karen 11/25/15	Lucas 11/25/15	Ray 11/25/15

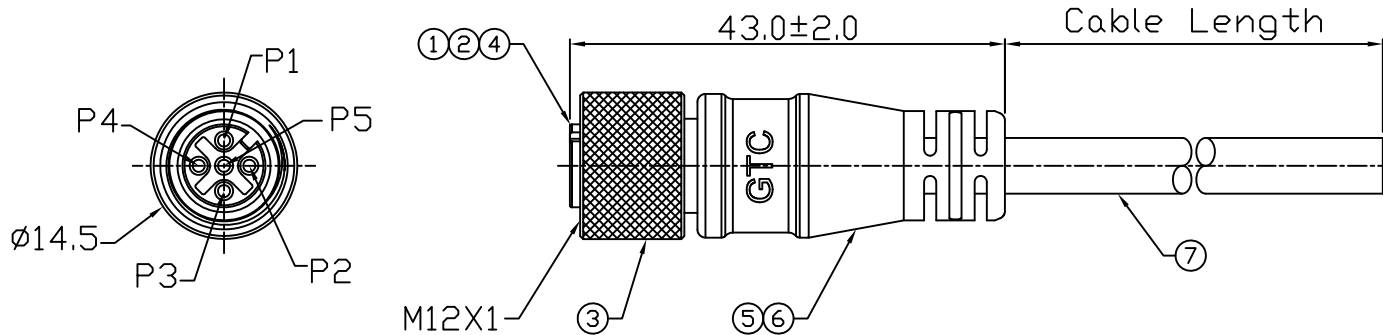

GT271124-21055-10	10000 mm	±500
GT271124-21055-09	9000 mm	±450
GT271124-21055-08	8000 mm	±400
GT271124-21055-07	7000 mm	±150
GT271124-21055-06	6000 mm	±150
GT271124-21055-05	5000 mm	±150
GT271124-21055-04	4000 mm	±150
GT271124-21055-03	3000 mm	±150
GT271124-21055-02	2000 mm	±100
GT271124-21055-01	1000 mm	±50
GT271124-21055-Z9	900 mm	±40
GT271124-21055-Z8	800 mm	±40
GT271124-21055-Z7	700 mm	±40
GT271124-21055-Z6	600 mm	±40
GT271124-21055-Z5	500 mm	±40
GT271124-21055-Z4	400 mm	±20
GT271124-21055-Z3	300 mm	±20
GT271124-21055-Z2	200 mm	±10
Part No.	Cable Length	Tol.

7	Cable	UL2725 18AWG*1P+22AWG*1P+AL/My+D+B Color: Black, OD: 6.0mm	1
6	Over Mold	PVC Color: Black	1
5	Inner Mold	PVC 30P Color: Black	1
4	O-Ring	Viton Color: Black	1
3	Screw Nut	Copper Alloy Finish: Ni Plated	1
2	Contacts	Copper Alloy Finish: Au Plated	5
1	Housing	Thermoplastic Color: Black	1
Item	Part Name	Material / Finish	Qty



1	Shield Braid
2	Red (18 AWG)
3	Black (18 AWG)
4	White (22 AWG)
5	Blue (22 AWG)

Wiring Diagram

TITLE					DRAWING NUMBER			REV.	
Micro 4A 5P Cable End Female With UL2725 Cable					GT271124-21055-XX			A1	
	B	N/A	Joyce 04/27/15	Lucas 04/27/15	Ray 04/27/15	XX ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm	1/1
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:
 THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT Contact CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:
 (1) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
 (2) NOT TO REPRODUCE OR COPY IT
 (3) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
 (4) ALL RIGHTS RESERVED