

1

2


3

4




Notes: (Unless Otherwise Specified)

- 1. Waterproof Rate: IP68
- 2. Suitable Cable \varnothing D= 5.0mm to 8.0mm
- 3. Recommend Cover Torque: 6~7 Kgf-cm.
- 4. Recommend Gland Nut Torque: 10~11 Kgf-cm.
- 5. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A1	ECN-200215	Modify Housing	Whitney 02/25/20	Lucas 02/25/20	Ray 02/25/20

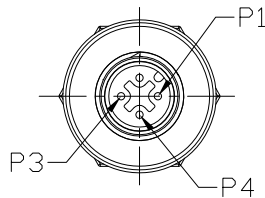

Pin Assignment

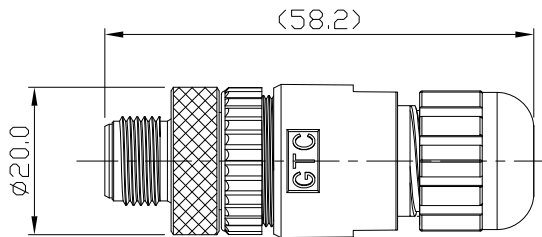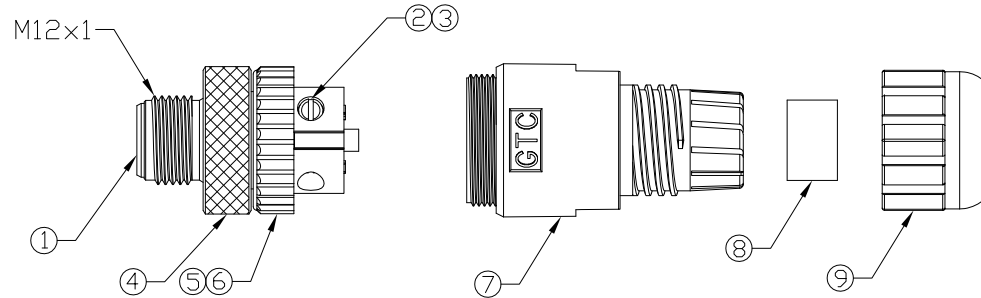

9	Gland Nut	Thermoplastic Color: Black	1
8	Gland	NBR Color: Black	1
7	Cover	Thermoplastic Color: Black	1
6	D-Ring	Silicone Color: Black	1
5	Screw Nut	Thermoplastic Color: Black	1
4	Screw Nut	Copper Alloy Finish: Ni Plated	1
3	Machine Screw	Cutting Iron Finish: Ni Plated	3
2	Contacts	Copper Alloy Finish: Ni Plated	3
1	Housing	Thermoplastic Color: Black	1
Item	Part Name	Material / Finish	Q'TY

TITLE						DRAWING NUMBER			REV.	
Micro 4A 3P Field Installable Cable End Male Screw-In						GT271154-31030			A1	
	B	1:1	Edwin 12/07/12	Lucas 12/07/12	Ray 12/07/12	X.X X.XX	± 0.5 ± 0.2	X.XXX ANGLES	± 0.05 $\pm 1^\circ$	mm 1/1
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES			UNIT	SHEET

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:
 THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT Contact CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:
 (a) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
 (b) NOT TO REPRODUCE OR COPY IT
 (c) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
 (d) ALL RIGHTS RESERVED

1

2

3

4