


Notes: (Unless Otherwise Specified)

1. Waterproof Rate: IP68.
2. Durability: 100 Cycles Min.
3. DWV: 1000 Vrms.
4. Rated Voltage: 60V AC/DC.
5. Insulation Resistance: 100 MΩ MIN.
6. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A0		Mass Production	Lucas 01/08/19	Lucas 01/08/19	Ray 01/08/19

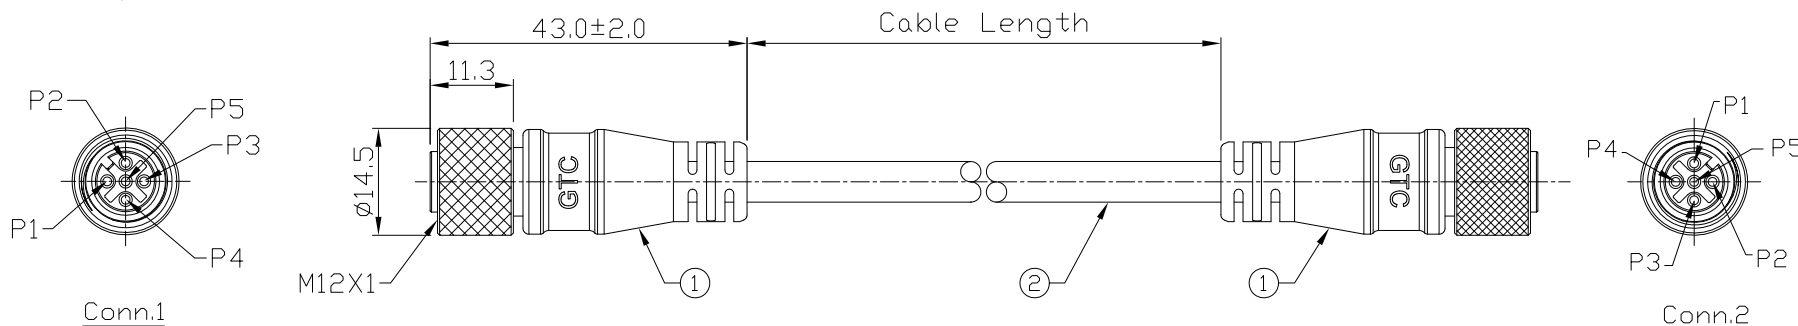

1	Shield Braid	1
2	Red (18 AWG)	2
3	Black (18 AWG)	3
4	White (22 AWG)	4
5	Blue (22 AWG)	5

Conn.1

Conn.2

Wiring Diagram

GT2711A4-21055-10	10000 mm	+500
GT2711A4-21055-09	9000 mm	+450
GT2711A4-21055-08	8000 mm	+400
GT2711A4-21055-07	7000 mm	+150
GT2711A4-21055-06	6000 mm	+150
GT2711A4-21055-05	5000 mm	+150
GT2711A4-21055-04	4000 mm	+150
GT2711A4-21055-03	3000 mm	+100
GT2711A4-21055-02	2000 mm	+100
GT2711A4-21055-01	1000 mm	+50
GT2711A4-21055-Z9	900 mm	+50
GT2711A4-21055-Z8	800 mm	+50
GT2711A4-21055-Z7	700 mm	+50
GT2711A4-21055-Z6	600 mm	+50
GT2711A4-21055-Z5	500 mm	+50
GT2711A4-21055-Z4	400 mm	+50
GT2711A4-21055-Z3	300 mm	+25
GT2711A4-21055-Z2	200 mm	+25
GT2711A4-21055-Z1	100 mm	+25

Part No.	Cable Length	Tol.
----------	--------------	------

2	Cable	UL2725 1P*18AWG+1P*22AWG+Al/My+D+B Color: Black, OD=6.0mm	1
1	M12 4A 5P Female	GT Contact P/N: GT271124-21051-XX	2
Item	Part Name	Material / Finish	Q'ty

TITLE						DRAWING NUMBER			REV.	
Micro 4A 5P Cable End Twin-head Female With UL2725 Cable						GT2711A4-21055-XX			A0	
THIRD ANGLE PROJECTION		SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET
		B	1:1	Lucas 01/08/19	Lucas 01/08/19	Ray 01/08/19	XX ± 0.5 XXX ± 0.05 XXX ± 0.2 ANGLES ± 1°		mm	1/1

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:
 THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT Contact CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:
 (a) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
 (b) NOT TO REPRODUCE OR COPY IT
 (c) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
 (d) ALL RIGHTS RESERVED