
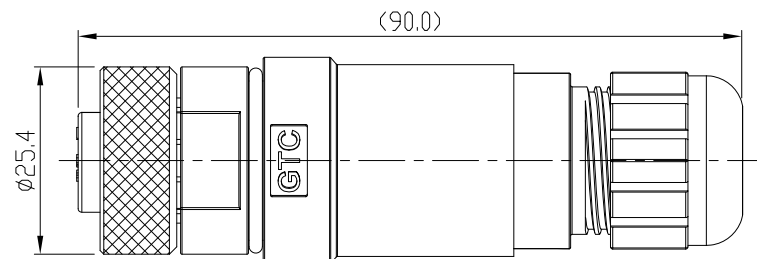


Notes: (Unless Otherwise Specified)

1. Suitable Cable OD= 8.0 mm to 12.5 mm
2. Recommend Cover Torque: 9 to 10 kgf-cm.
3. Recommend Gland Nut Torque: 15 to 20 kgf-cm.
4. RoHS Compliant.
5. Wire Range Is 16~12AWG.

| REV | ECN#       | DESCRIPTION OF REVISION     | DRAW BY DATE      | CHECK BY DATE     | APPROVE BY DATE |
|-----|------------|-----------------------------|-------------------|-------------------|-----------------|
| A2  | ECN-210717 | Housing Material PUR => PVC | Joyce<br>07/23/21 | Lucas<br>07/23/21 | Ray<br>07/23/21 |

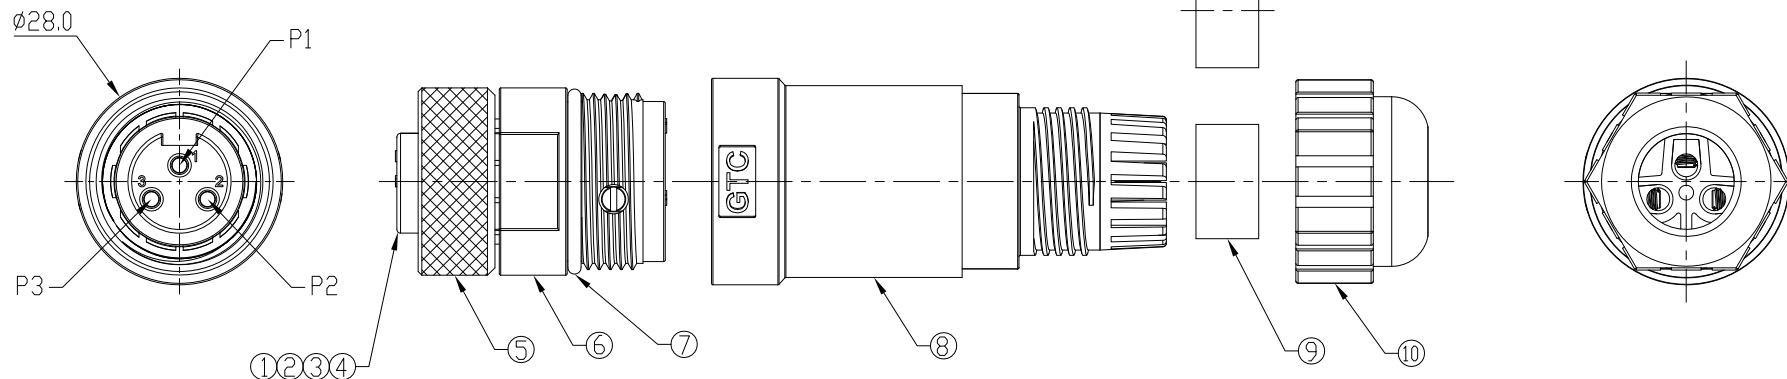

| 5    | Screw Nut | Copper Alloy<br>Finish: Ni Plated | 1    | 10   | Gland Nut | Thermal Plastic<br>Color: Black                | 1    |
|------|-----------|-----------------------------------|------|------|-----------|--|------|
| 4    | Screw     | S15C<br>Finish: Ni Plated         | 3    | 9    | Gland     | NBR ; ID=8.0mm*1 , ID=12.5mm*1<br>Color: Black | 2    |
| 3    | Sleeve    | Copper Alloy<br>Color: Ni Plated  | 3    | 8    | Cover     | Thermal Plastic<br>Color: Black                | 1    |
| 2    | Contacts  | Copper Alloy<br>Finish: Au Plated | 3    | 7    | O-Ring    | Silicone<br>Color: Black                       | 1    |
| 1    | Housing   | PVC<br>Color: Black               | 1    | 6    | Base      | Thermal Plastic<br>Color: Black                | 1    |
| Item | Part Name | Material / Finish                 | Q'ty | Item | Part Name | Material / Finish                              | Q'ty |



GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT Contact CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:  
 (i) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE  
 (ii) NOT TO REPRODUCE OR COPY IT  
 (iii) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART  
 (iv) ALL RIGHTS RESERVED

| TITLE   |      |       |                |                |                | DRAWING NUMBER          |                             |      | REV.  |
|---|------|-------|----------------|----------------|----------------|-------------------------|-----------------------------|------|-------|
| Mini 13A 3P Field Installable Cable End Female Screw-In |      |       |                |                |                | GT272244-34030          |                             |      | A2    |
|   | B    | 1:1   | Edwin 03/15/11 | Lucas 03/15/11 | Ray 03/15/11   | X.X ± 0.5<br>X.XX ± 0.2 | X.XXX ± 0.05<br>ANGLES ± 1° | mm   | 1/1   |
| THIRD ANGLE PROJECTION                                  | SIZE | SCALE | DRAW / DATE    | CHECK / DATE   | APPROVE / DATE | TOLERANCES              |                             | UNIT | SHEET |