



GT Contact CO.,LTD

GT125380-X0/GT125580-X0 Installable Instructions

GT225380-X0/GT225580-X0 Installable Instructions

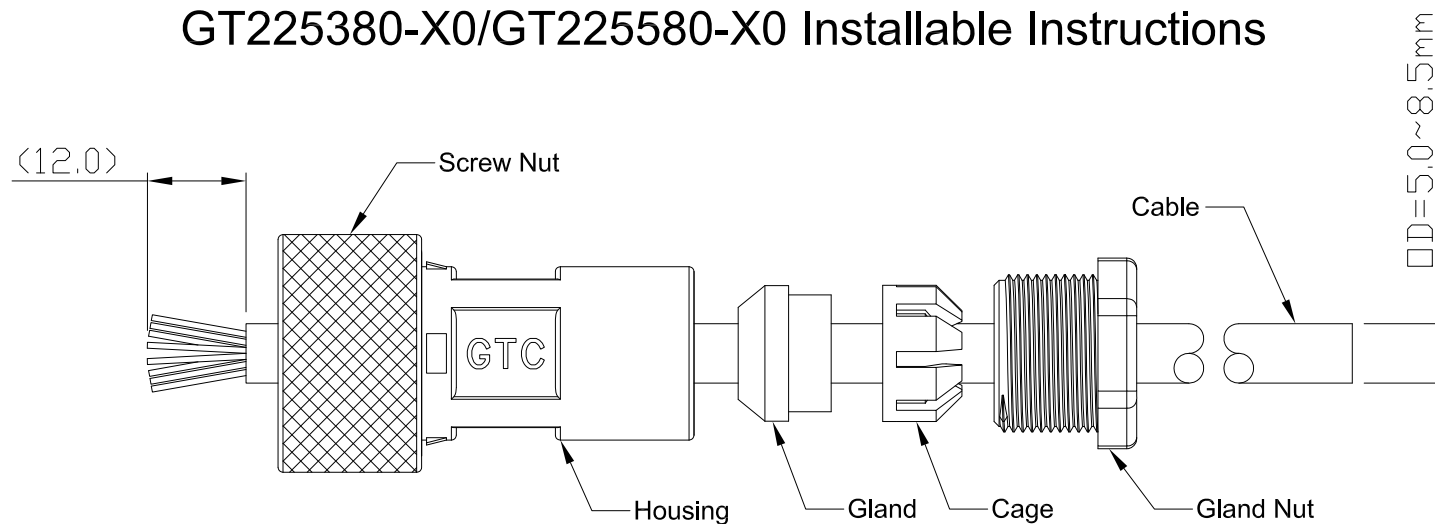

- 1.) Strip cable jacket 12.0mm
- 2.) Pass cable through all components.
- 3.) Resection RJ45 plug latch

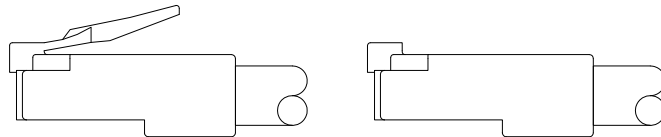

- 4.) Assembly gland, cage, gland nut to housing, tightening (9.0 to 10.0 kgf-cm)

<http://www.gtcontact.com>
Contact: sales@gtcontact.com