





Rugged Waterproof Type C Connector with FPC IP67 / 68



All customization is available

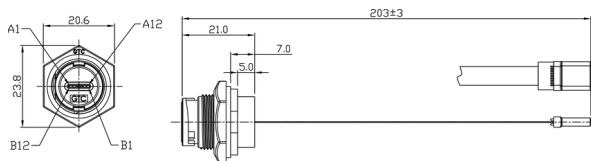

GT11C200-CS-FPC-Z2

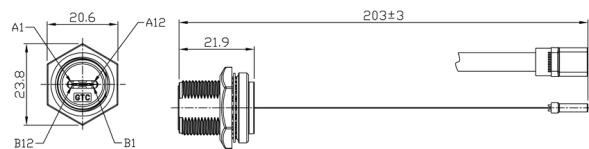

GT21C300-CS-FPC-Z2

Engineering Specifications		
Operation Temperature	-40°C to +85°C	
Current Rating	5A Max for VBUS 0.25A Max for Others	
IP Rating	Plastic	IP67
	Metal	IP68

Material		
	Plastic	Metal
Panel Housing	PA66	Zn Alloy, Ni Plated
Type C Receptacle Housing	Thermoplastic	
Type C Receptacle Contacts	Copper Alloy, Au Plated	
Type C Receptacle Shell	Stainless Steel, Ni Plated	
Panel Gasket	Silicone	
Panel Hex Nut	PA66	Zn Alloy, Ni Plated
Glue	Epoxy	
Cable End Nut	PA66	Zn Alloy, Ni Plated
Type C Plug Housing	Thermoplastic	
Type C Plug Contacts	Copper Alloy, Au Plated	
Type C Plug Shell	Stainless Steel, Ni Plated	
Cable End Rubber Pad	Silicone	
Inner / Over Mold	PVC	