

1

2


3

4

Notes: (Unless Otherwise Specified)

- 1. Waterproof Rate: IP67.
- 2. Recommend Panel Thickness: 0.8 to 6.0 mm.
- 3. Recommend Torque: 19~20 Kgf-cm.
- 4. Mating Cap P/N: GT1C1110X2.
- 5. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A1	ECN-210135	Modify The Dimensions of Shrink Tube (25) -> (10.0)	Joyce 01/29/21	Lucas 01/29/21	Ray 01/29/21

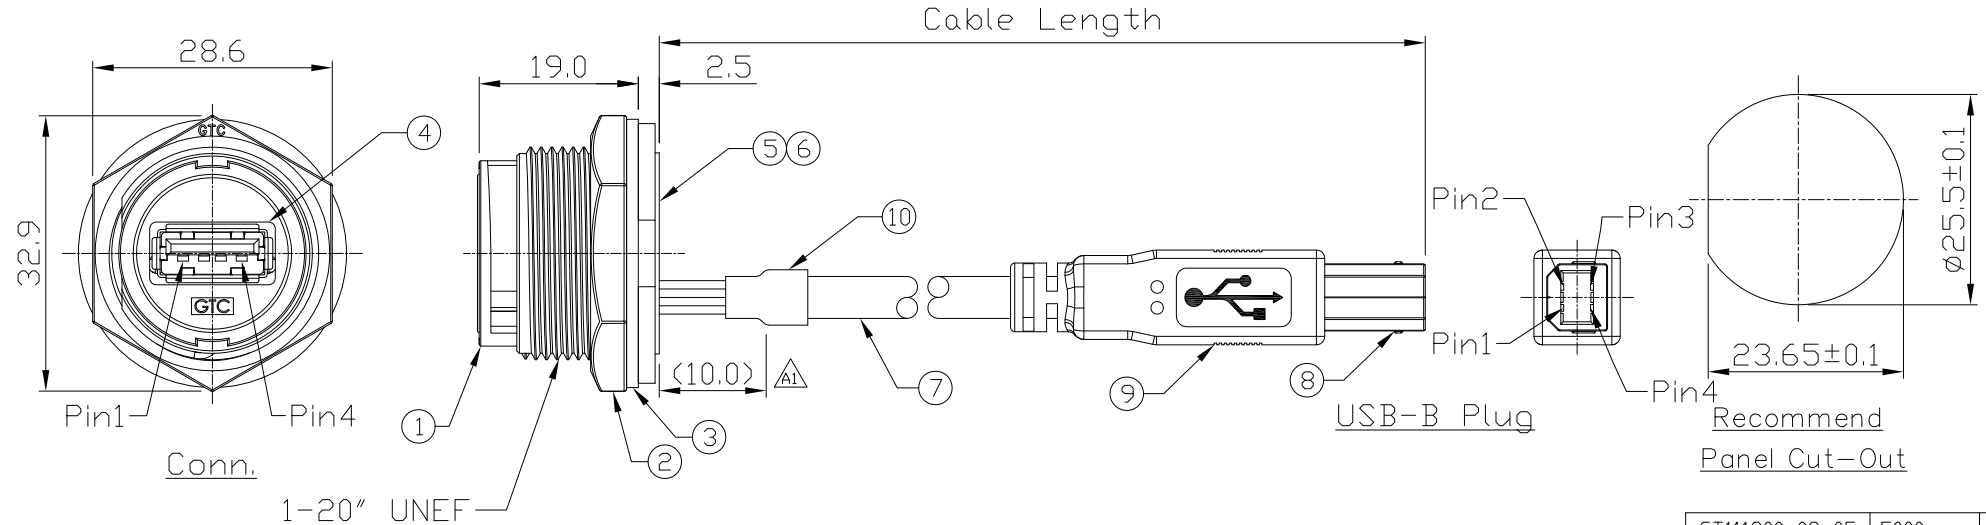

10	Shrink Tube	L=20mm Color: Black	1
9	Over Mold	PVC Color: Black	1
8	USB-B Plug	Housing: Thermoplastic, Color: Black Contacts: Copper Alloy, Finish: Au Plated Shell: Cold Roll Steel, Finish: Ni Plated	1
7	Cable	UL2725 IP*28AWG+2C*24AWG+Al/My+D+B Color: Black, OD=5.0mm	1
6	Glue	Epoxy Color: Black	
5	PCB	FR-4 Color: —	1
4	USB-A Receptacle	Housing: Thermoplastic, Color: Black Contacts: Copper Alloy, Finish: Au Plated Shell: Copper Alloy, Finish: Ni Plated	1
3	Gasket	Silicone Color: Black	1
2	Hex Nut	Thermoplastic Color: Black	1
1	Housing	Thermoplastic Color: Black	1
Item	Part Name	Material / Finish	QTY



GT111200-09-05	5000 mm	±150
GT111200-09-01	1000 mm	±50
GT111200-09-Z9	900 mm	±40
GT111200-09-Z8	800 mm	±40
GT111200-09-Z7	700 mm	±40
GT111200-09-Z6	600 mm	±40
GT111200-09-Z5	500 mm	±40
GT111200-09-Z4	400 mm	±20
GT111200-09-Z3	300 mm	±20
GT111200-09-Z2	200 mm	±10
GT111200-09-Z1	100 mm	±10
Part No.	Cable Length	Tol.

TITLE						DRAWING NUMBER			REV.
USB-A Plastic C4 Panel Jack Lock With Cable + USB-B Plug						GT111200-09-XX			A1
	B	1:1	Vicky 12/13/10	Ray 12/13/10	Ray 12/13/10	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm	1/1
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:  
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT CONTACT CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:  
(a) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE  
(b) NOT TO REPRODUCE OR COPY IT  
(c) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART  
(d) ALL RIGHTS RESERVED

1

2

3

4