

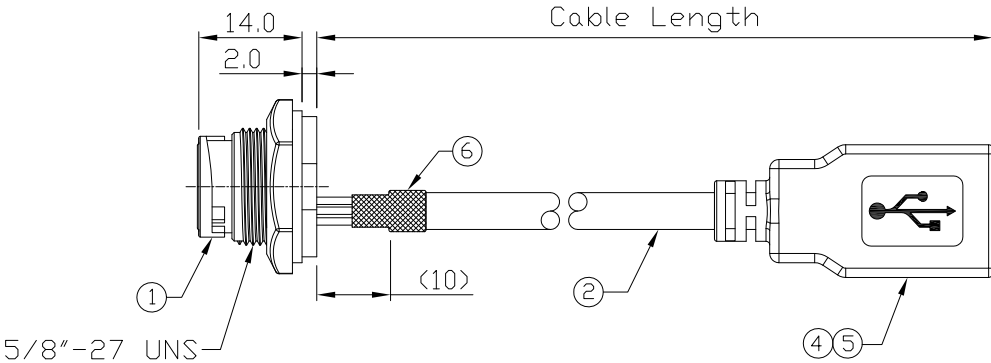




Notes: (Unless Otherwise Specified)

- 1. Waterproof Rate: IP67.
- 2. Recommend Panel Thickness: 0.8 to 3.0 mm.
- 3. Recommend Torque: 9~10 Kgf-cm.
- 4. Mating Cap P/N: GT1C1210X2.
- 5. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A0	ECN-240501	Updated The USB Receptacles Insulator From White To Black Color	Aileen 08/09/24	Hank 08/09/24	Lucas 08/09/24



6	Shrink Tube	L=20mm Color: Black	1
5	Over Mold	PVC Color: Black	1
4	Inner Mold	Thermoplastic Color: White Or Black	1
3	USB-A Receptacle	Housing: Thermoplastic Contacts: Copper Alloy, Finish: Gold Flash Shell: SPCC, Finish: Ni Plated	1
2	Cable	UL2725 1P*28AWG+2C*24AWG+Al/My+D+B OD=5.0mm, Color: Black	1
1	Mini USB-B Plastic C2 Panel Jack Lock	GT Contact GT114200-0X-XX	1
Item	Part Name	Material / Finish	Q'ty

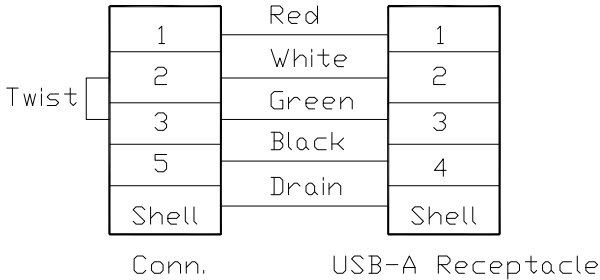

Wiring Diagram

GT114200-06-02	2000 mm	+100
GT114200-06-01	1000 mm	+50
GT114200-06-Z9	900 mm	+50
GT114200-06-Z8	800 mm	+50
GT114200-06-Z7	700 mm	+50
GT114200-06-Z6	600 mm	+50
GT114200-06-Z5	500 mm	+50
GT114200-06-Z4	400 mm	+50
GT114200-06-Z3	300 mm	+25
GT114200-06-Z2	200 mm	+25
GT114200-06-Z1	100 mm	+25
Part No.	Cable Length	Tol.

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT CONTACT CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:
(i) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
(ii) NOT TO REPRODUCE OR COPY IT
(iii) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
(iv) ALL RIGHTS RESERVED

TITLE Mini USB-B Plastic C2 Panel Jack Lock + USB-A Receptacle With Cable						DRAWING NUMBER GT114200-06-XX			REV. A0	
DO NOT SCALE DRAWINGS	B	1:1	Whitney 02/18/20	Lucas 02/18/20	Ray 02/18/20	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm	1/1	
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES			UNIT	SHEET