
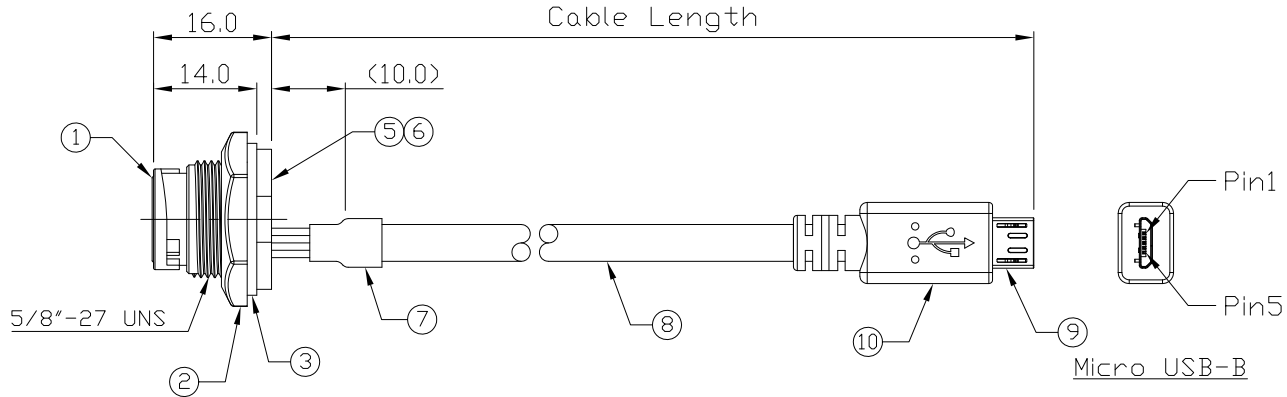




Notes: (Unless Otherwise Specified)

- 1. Waterproof Rate: IP67.
- 2. Recommend Panel Thickness: 0.8 to 3.0 mm.
- 3. Recommend Torque: 9~10 Kgf-cm.
- 4. Mating Cap P/N: GT1C1210X2.
- 5. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
01			Hank 10/08/20	Lucas 10/08/20	Ray 10/08/20



10	Over Mold	PVC Color: Black	1
9	Micro USB-B Plug	Contacts: Copper Alloy; Finish: Au Plated Housing: Thermoplastic; Color: Black Shell: Copper Alloy; Finish: Ni Plated	1
8	Cable	UL2725 1P*28AWG+3C*24AWG+Al/My+D+B OD=5.0mm, Color: Black	1
7	Shrink Tube	L=20mm Color: Black	1
6	Glue	Epoxy Color: Black	
5	PCB	FR-4 Color: —	1
4	Mini USB-B Receptacle	Housing: Thermoplastic, Color: Black Contacts: Copper Alloy, Finish: Au Plated Shell: Copper Alloy, Finish: Ni Plated	1
3	Gasket	Silicone Color: Black	1
2	Hex Nut	Thermoplastic Color: Black	1
1	Housing	Thermoplastic Color: Black	1
Item	Part Name	Material / Finish	Q'ty



Recommend Panel Cut-Out



Wiring Diagram

GT114200-0P-02	2000 mm	+100
GT114200-0P-01	1000 mm	+50
GT114200-0P-Z9	900 mm	+50
GT114200-0P-Z8	800 mm	+50
GT114200-0P-Z7	700 mm	+50
GT114200-0P-Z6	600 mm	+50
GT114200-0P-Z5	500 mm	+50
GT114200-0P-Z4	400 mm	+50
GT114200-0P-Z3	300 mm	+25
GT114200-0P-Z2	200 mm	+25
GT114200-0P-Z1	100 mm	+25
Part No.	Cable Length	Tol.

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:
 THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT CONTACT CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:
 (A) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
 (B) NOT TO REPRODUCE OR COPY IT
 (C) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
 (D) ALL RIGHTS RESERVED

TITLE						DRAWING NUMBER			REV.
Mini USB-B Plastic C2 Panel Jack Lock With Micro USB-B Plug						GT114200-0P-XX			01
	B	1:1	Hank 10/08/20	Lucas 10/08/20	Ray 10/08/20	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm	1/1
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET