




Notes: (Unless Otherwise Specified)

1. Waterproof Rate: IP67.
2. Recommend Panel Thickness: 0.8 to 3.0 mm.
3. Recommend Torque: 9~10 Kgf-cm.
4. Mating Cap P/N: GT1C5121X2
5. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A0		Mass Production	Lucas 08/24/12	Ray 08/24/12	Ray 08/24/12

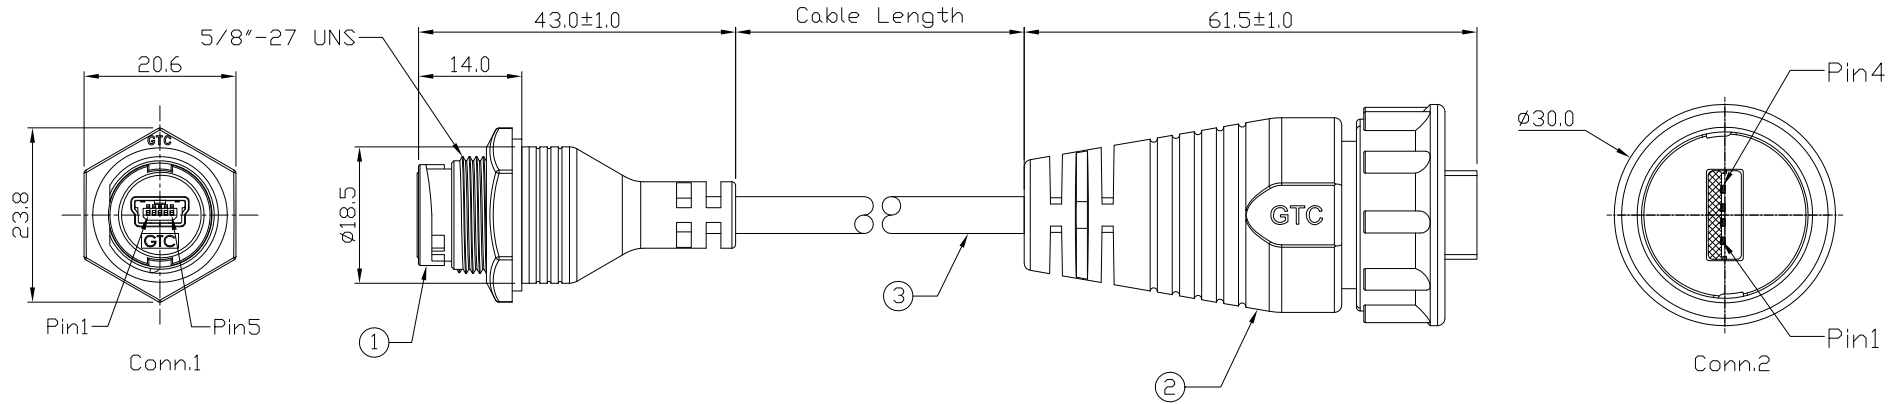

GTC  
DOC.CENTER.ISSUE  
AUG.24.2012  
ONLY FOR  
RELEASE

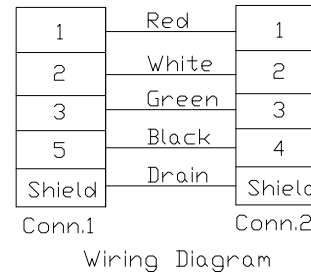

GT114210-0C-10	10000 mm	±500
GT114210-0C-09	9000 mm	±450
GT114210-0C-08	8000 mm	±400
GT114210-0C-07	7000 mm	±350
GT114210-0C-06	6000 mm	±300
GT114210-0C-05	5000 mm	±250
GT114210-0C-04	4000 mm	±200
GT114210-0C-03	3000 mm	±150
GT114210-0C-02	2000 mm	±100
GT114210-0C-01	1000 mm	±50
GT114210-0C-Z5	500 mm	±40
Part No.	Cable Length	Tol.

Item	Part Name	Material / Finish	Q'ty
3	Cable	UL2725 1P*28AWG+2C*24AWG+Al/My+D+B(UV) OD=5.0mm, Color: Black	1
2	USB-A Plastic C4 Cable End Plug	GT Contact P/N: GT111220-01-XX	1
1	Mini USB-B Plastic C2 C to C Lock With Cable	GT Contact P/N: GT114210-01-XX	1

TITLE						DRAWING NUMBER			REV.	
Twin-head Plastic Mini USB-B C2 Cable to Cable Lock With USB-A C4 Cable end Lock						GT114210-0C-XX			A0	
	B	1:1	Lucas 08/24/12	Ray 08/24/12	Ray 08/24/12	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm	1/1	
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET	

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT CONTACT CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:

(i) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE  
(ii) NOT TO REPRODUCE OR COPY IT  
(iii) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART  
(iv) ALL RIGHTS RESERVED