Notes: (Unless Otherwise Specified)

1. Waterproof Rate: IP67.
2. Recommend Panel Thickness: 0.8 to 3.0 mm.
3. Recommend Torque: 9~10 Kgf-cm.
4. Mating Cap P/N: GT1C5121X2
5. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A0			Jenny 03/09/22	Lucas 03/09/22	Ray 03/09/22

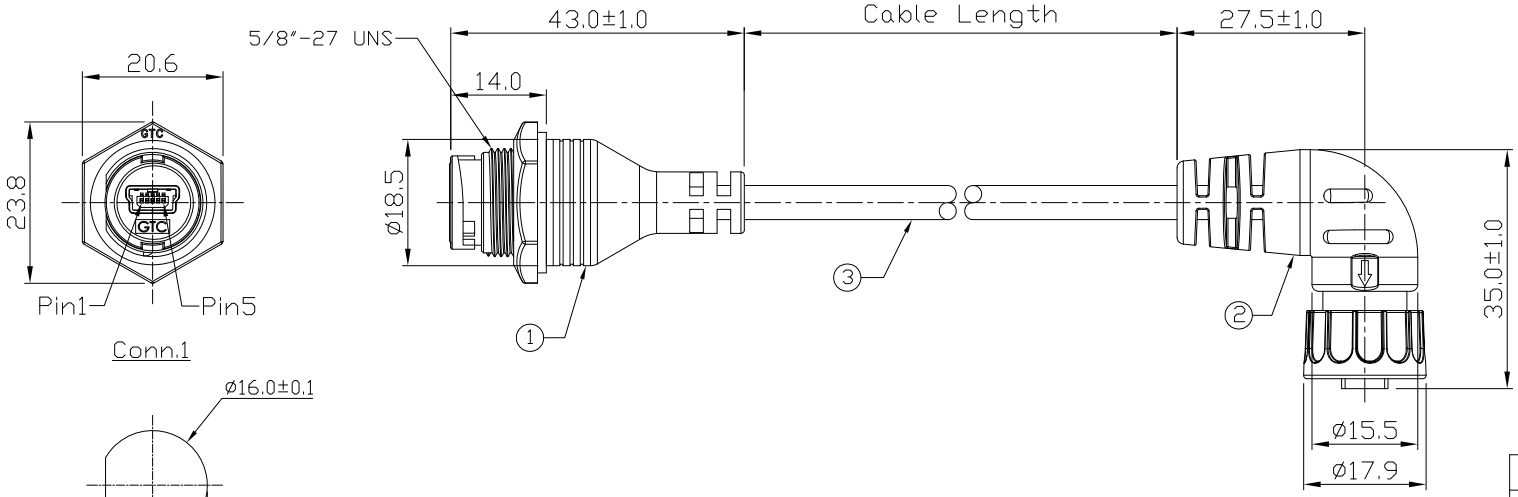

GTC
DOC.CENTER.ISSUE
MAR.09.2022
ONLY FOR RELEASE

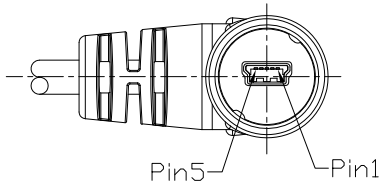

Wiring Diagram

Part No.	Cable Length	Tol.
GT114210-0L-10	10000 mm	+500
GT114210-0L-09	9000 mm	+450
GT114210-0L-08	8000 mm	+400
GT114210-0L-07	7000 mm	+150
GT114210-0L-06	6000 mm	+150
GT114210-0L-05	5000 mm	+150
GT114210-0L-04	4000 mm	+150
GT114210-0L-03	3000 mm	+100
GT114210-0L-02	2000 mm	+100
GT114210-0L-01	1000 mm	+50
GT114210-0L-Z5	500 mm	+50

Item	Part Name	Material / Finish	Q'ty
3	Cable	UL2725 1P*28AWG+3C*24AWG+Al/My+D+B OD=5.0mm, Color: Black	1
2	Mini USB-B Plastic C2 Cable End Right Angle Plug Lock	GT Contact P/N: GT114229-01-XX	1
1	Mini USB-B Plastic C2 C to C Lock With Cable	GT Contact P/N: GT114210-01-XX	1

TITLE	DRAWING NUMBER	REV.
Mini USB-B Plastic C2 Cable To Cable Jack Lock With Mini USB-B Plastic C2 Right Angle Plug Lock	GT114210-0L-XX	A0

DO NOT SCALE DRAWINGS	B	1:1	Jenny 03/09/22	Lucas 03/09/22	Ray 03/09/22	X.X ± 0.5 X.XXX ± 0.05 X.XX ± 0.2 ANGLES ± 1°	mm	1/1
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES	UNIT	SHEET

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT Contact CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:
(i) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
(ii) NOT TO REPRODUCE OR COPY IT
(iii) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
(iv) ALL RIGHTS RESERVED