

1

2


3

4


Notes: (Unless Otherwise Specified)

- 1. Waterproof Rate: IP67.
- 2. Recommend Panel Thickness: 0.8 to 4.0 mm.
- 3. Recommend Torque: 14~15 Kgf-cm.
- 4. Mating Cap P/N: GT1C1310X2.
- 5. RoHS Compliant.


REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A0			Aileen 02/25/22	Lucas 02/25/22	Ray 02/25/22

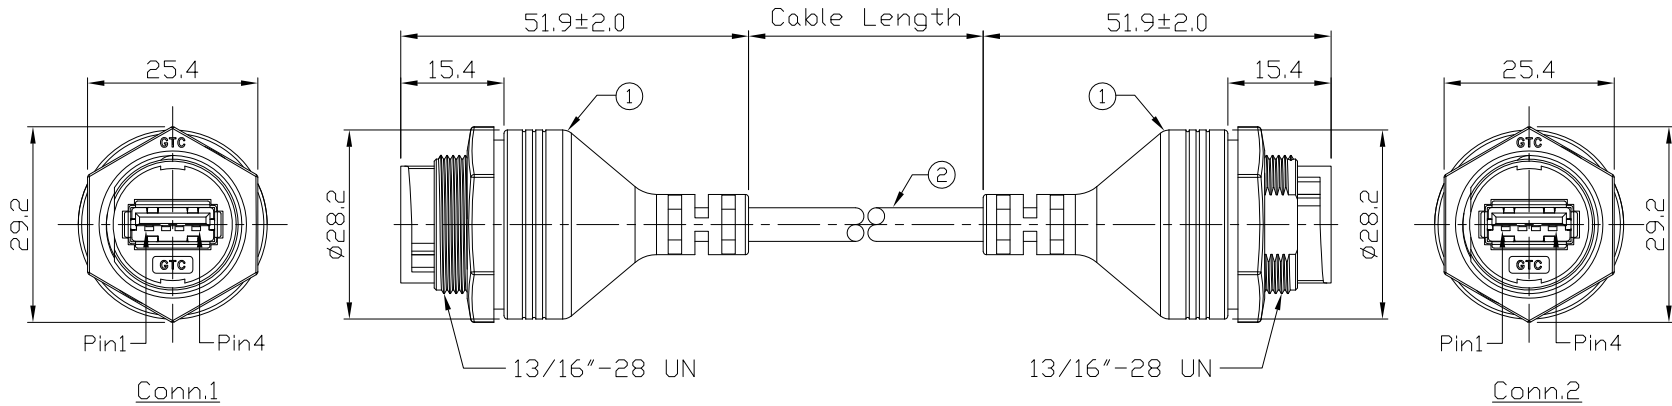

Part No.	Cable Length	Tol.
GT116210-0M-10	10000 mm	+500
GT116210-0M-09	9000 mm	+450
GT116210-0M-08	8000 mm	+400
GT116210-0M-07	7000 mm	+150
GT116210-0M-06	6000 mm	+150
GT116210-0M-05	5000 mm	+150
GT116210-0M-04	4000 mm	+150
GT116210-0M-03	3000 mm	+100
GT116210-0M-02	2000 mm	+100
GT116210-0M-01	1000 mm	+50
GT116210-0M-29	900 mm	+50
GT116210-0M-28	800 mm	+50
GT116210-0M-27	700 mm	+50
GT116210-0M-26	600 mm	+50
GT116210-0M-25	500 mm	+50
GT116210-0M-24	400 mm	+50
GT116210-0M-23	300 mm	+25
GT116210-0M-22	200 mm	+25



Recommend Panel Cut-Out

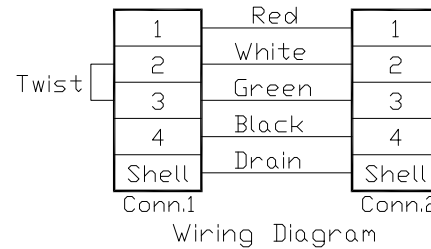

Item	Part Name	Material / Finish	Q'ty
2	Cable	UL2725 1P*28AWG+2C*24AWG+Al/My+D+B OD=5.0mm, Color: Black	1
1	USB-A Plastic C3 Cable To Cable Jack Lock	GT Contact P/N: GT116210-0X	2

TITLE						DRAWING NUMBER			REV.	
Dual USB-A Plastic C3 Cable To Cable Jack Lock						GT116210-0M-XX			A0	
	B	N/A	Aileen 02/25/22	Lucas 02/25/22	Ray 02/25/22	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm	1/1	
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET	

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:
 THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT Contact CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:
 (a) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
 (b) NOT TO REPRODUCE OR COPY IT
 (c) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
 (d) ALL RIGHTS RESERVED

1

2

3

4