




Notes: (Unless Otherwise Specified)

1. Waterproof Rate: IP67.
2. Recommend Panel Thickness: 0.8 to 6.0 mm.
3. Recommend Torque: 14~15 Kgf-cm.
4. Mating Cap P/N: GT1C5331X2.
5. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A3	ECN-230106	Change The Same Cable Length Tol. As IPC620.	Aileen 01/16/23	Lucas 01/16/23	Ray 01/16/23

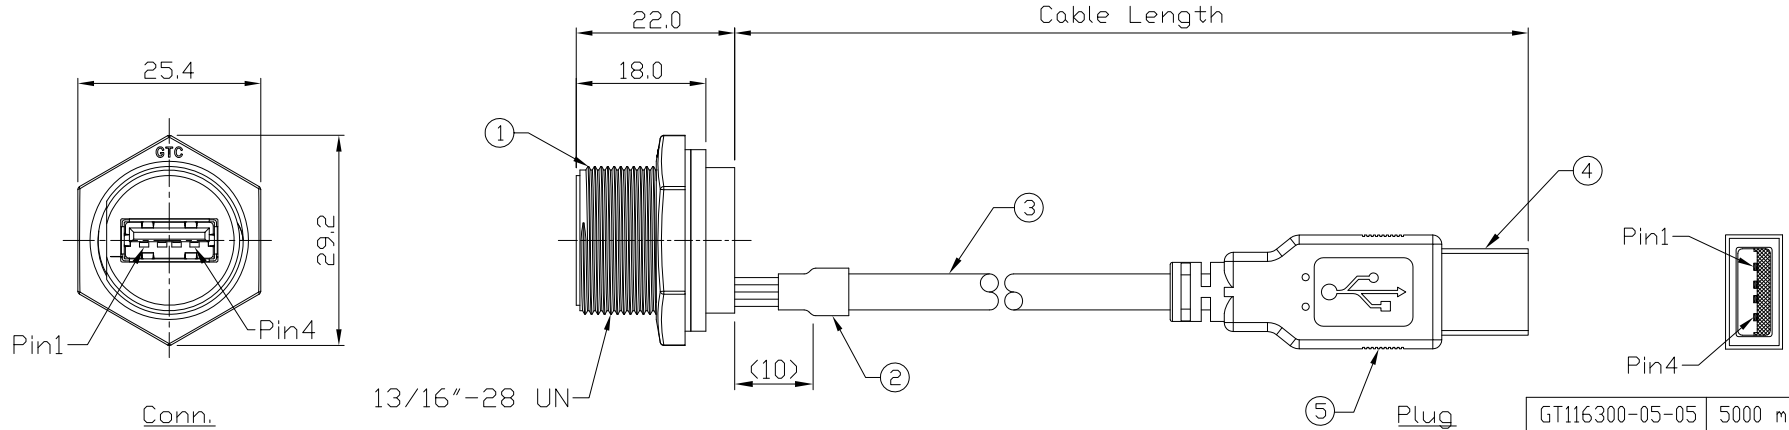

GTC
DOC.CENTER.ISSUE
JAN.16.2023
ONLY FOR
RELEASE

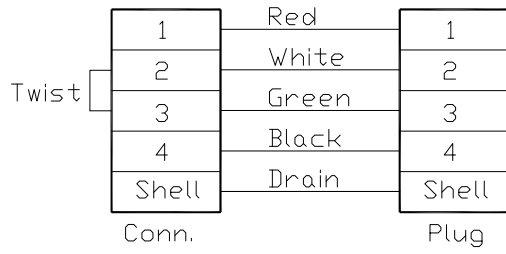

GT116300-05-05	5000 mm	+150
GT116300-05-04	4000 mm	+150
GT116300-05-03	3000 mm	+100
GT116300-05-02	2000 mm	+100
GT116300-05-01	1000 mm	+50
GT116300-05-Z9	900 mm	+50
GT116300-05-Z8	800 mm	+50
GT116300-05-Z7	700 mm	+50
GT116300-05-Z6	600 mm	+50
GT116300-05-Z5	500 mm	+50
GT116300-05-Z4	400 mm	+50
GT116300-05-Z3	300 mm	+25
GT116300-05-Z2	200 mm	+25
GT116300-05-Z1	100 mm	+25
Part No.	Cable Length	Tol. A3

Item	Part Name	Material / Finish	Q'ty
5	Over Mold	PVC Color: Black	1
4	USB-A Plug	Housing: Thermoplastic, Color: Black Contacts: Copper Alloy, Finish: Au Plated Shell: Cold Roll Steel, Finish: Ni Plated	1
3	Cable	UL2725 1P*28AWG+2C*24AWG+Al/My+D+B OD=5.0mm, Color: Black	1
2	Shrink Tube	L=20mm Color: Black	1
1	GT116300-03-XX	USB-A Plastic C3 Panel Jack Screw With Pig Tail	1

TITLE						DRAWING NUMBER			REV.	
USB-A Plastic C3 Panel Jack Screw with Cable + USB-A Plug						GT116300-05-XX			A3	
DO NOT SCALE DRAWINGS		B	1:1	Joyce 06/28/11	Lucas 06/28/11	Ray 06/28/11	XX ± 0.5 X.XX ± 0.2	XXX ± 0.05 ANGLES ± 1°	mm	1/1
THIRD ANGLE PROJECTION		SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT CONTACT CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:

(1) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
 (2) NOT TO REPRODUCE OR COPY IT
 (3) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
 (4) ALL RIGHTS RESERVED