


Notes: (Unless Otherwise Specified)


1. Waterproof Rate: IP67.
2. Recommend Panel Thickness: 0.8 to 6.0 mm.
3. Recommend Torque: 14~15 Kgf-cm.
4. Mating Cap P/N: GT1C5331X2.
5. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A0		Mass Production	Joyce 05/22/14	Lucas 05/22/14	Ray 05/22/14
A1	ECN-140805	Modify Item 7, Shrink Tube L=10mm to 20mm ^{AI}	Joyce 08/07/14	Lucas 08/07/14	Ray 08/07/14


GTC
DOC.CENTER.ISSUE
AUG.19.2014
ONLY FOR
RELEASE

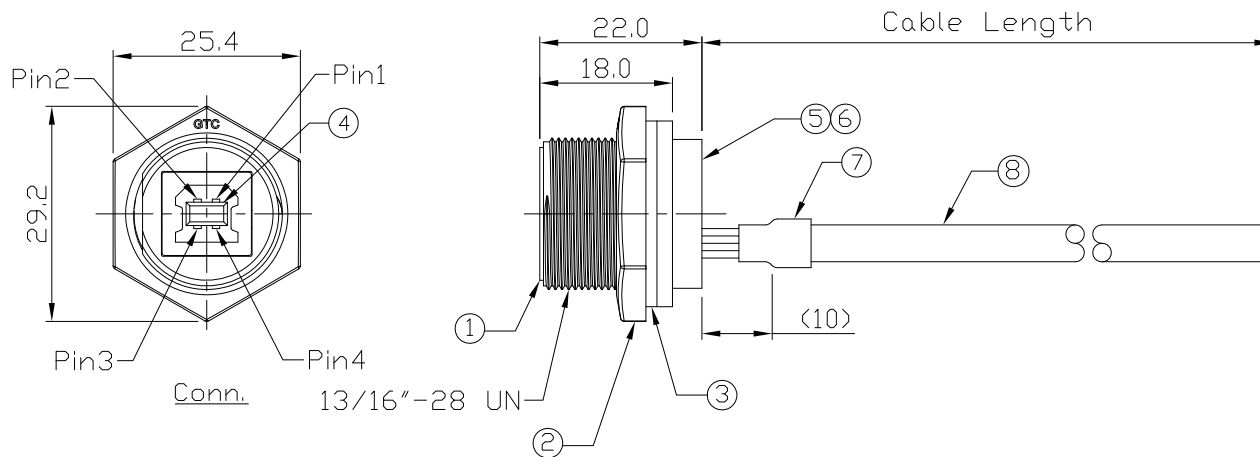

8	Cable	UL2725 1P*28AWG+2C*24AWG+Al/My+D+B OD=5.0mm, Color: Black	1
7	Shrink Tube	L=20mm Color: Black	1 ^{AI}
6	Glue	Epoxy Color: Black	
5	PCB	FR-4 Color: —	1
4	USB-B Receptacle	Housing: Thermoplastic, Color: Black Contacts: Copper Alloy, Finish: Au Plated Shell: Copper Alloy, Finish: Ni Plated	1
3	Gasket	Silicone Color: Black	1
2	Hex Nut	Thermoplastic Color: Black	1
1	Housing	Thermoplastic Color: Black	1
Item	Part Name	Material / Finish	Q'ty



Recommend
Panel Cut-Out

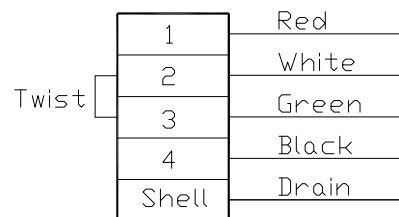

Wiring Diagram

GT117300-03-01	1000 mm	±50
GT117300-03-Z9	900 mm	±40
GT117300-03-Z8	800 mm	±40
GT117300-03-Z7	700 mm	±40
GT117300-03-Z6	600 mm	±40
GT117300-03-Z5	500 mm	±40
GT117300-03-Z4	400 mm	±20
GT117300-03-Z3	300 mm	±20
GT117300-03-Z2	200 mm	±10
GT117300-03-Z1	100 mm	±10

Part No.	Cable Length	Tol.
----------	--------------	------

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT Contact CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:
(a) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
(b) NOT TO REPRODUCE OR COPY IT
(c) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
(d) ALL RIGHTS RESERVED

TITLE						DRAWING NUMBER			REV.
USB-B Plastic C3 Panel Jack Screw With Cable						GT117300-03-XX			A1
	B	1:1	Joyce 05/22/14	Lucas 05/22/14	Ray 05/22/14	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm	1/1
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET