

1

2





3

4


Notes: (Unless Otherwise Specified)

- 1. Waterproof Rate: IP67.
- 2. Recommend Panel Thickness: 0.8 to 4.5 mm.
- 3. Recommend Torque: 14~15 Kgf-cm.
- 4. Mating Cap P/N: GT1C1310X2.
- 5. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
01			Aileen 11/16/20	Lucas 11/16/20	Ray 11/16/20

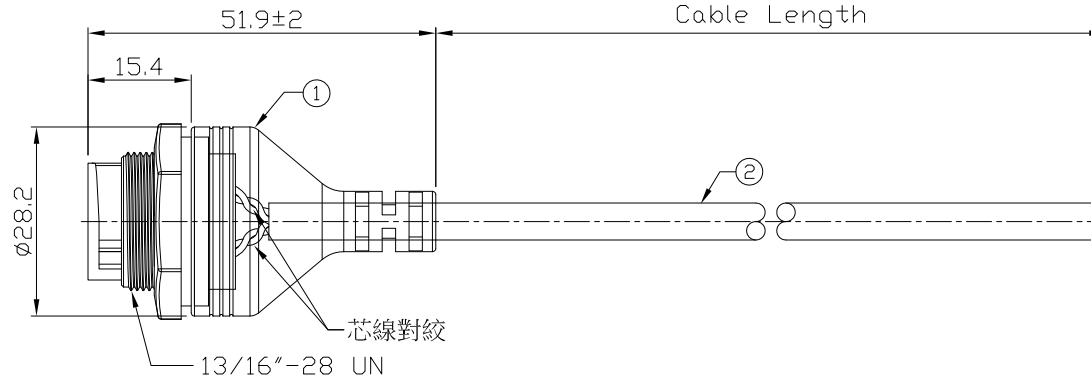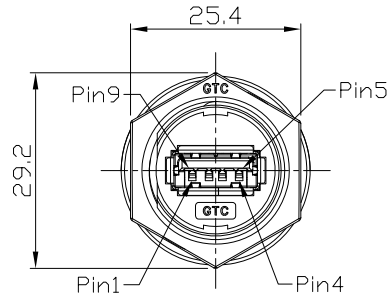

Recommend Panel Cut-Out

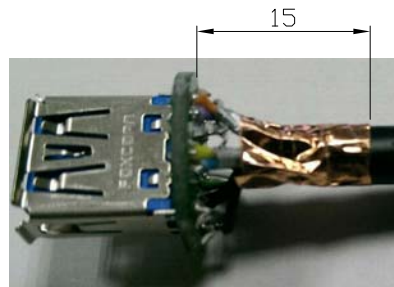

USB3.0兩組對絞線跟鋁箔PCB板距離2~3mm
編織需與雙面導電銅箔導通且距PCB板4~5mm

Pin	Color
1	Red
2	White
3	Green
4	Black
5	Blue
6	Yellow
7	Drain
8	Purple
9	Orange
Shell	Braid

Wiring Diagram

Part No.	Cable Length	Tol.
GT118210-01-03	3000 mm	+100
GT118210-01-02	2000 mm	+100
GT118210-01-01	1000 mm	+50
GT118210-01-29	900 mm	+50
GT118210-01-28	800 mm	+50
GT118210-01-27	700 mm	+50
GT118210-01-26	600 mm	+50
GT118210-01-25	500 mm	+50
GT118210-01-24	400 mm	+50
GT118210-01-23	300 mm	+25
GT118210-01-22	200 mm	+25

Item	Part Name	Material / Finish	Q'ty
2	Cable	UL2725 (1P*28AWG+EAM)*2+(1PR*28AWG+A)+2C*22AWG+AB 85% Color: Black, OD=5.5mm	1
1	USB-A 3.0 Plastic C3 Panel Jack Lock	GT Contact P/N: GT118210-01	1

TITLE						DRAWING NUMBER			REV.
USB-A 3.0 Plastic C3 Panel Jack Lock With Cable						GT118210-01-XX			01
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES	UNIT	SHEET	
DD NOT SCALE DRAWINGS	B	N/A	Aileen 11/16/20	Lucas 11/16/20	Ray 11/16/20	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm 1/1	

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT Contact CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:
(a) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
(b) NOT TO REPRODUCE OR COPY IT
(c) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
(d) ALL RIGHTS RESERVED

1

2

3

4