



Notes: (Unless Otherwise Specified)

1. Waterproof Rate: IP67.
2. Recommend Panel Thickness : 0.8 to 3.0 mm.
3. Recommend Torque: 9~10 Kgf-cm.
4. Mating Cap P/N: GT1C1210X2.
5. RoHS & REACH Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
01			Lucas 07/30/14	Ray 07/30/14	Ray 07/30/14

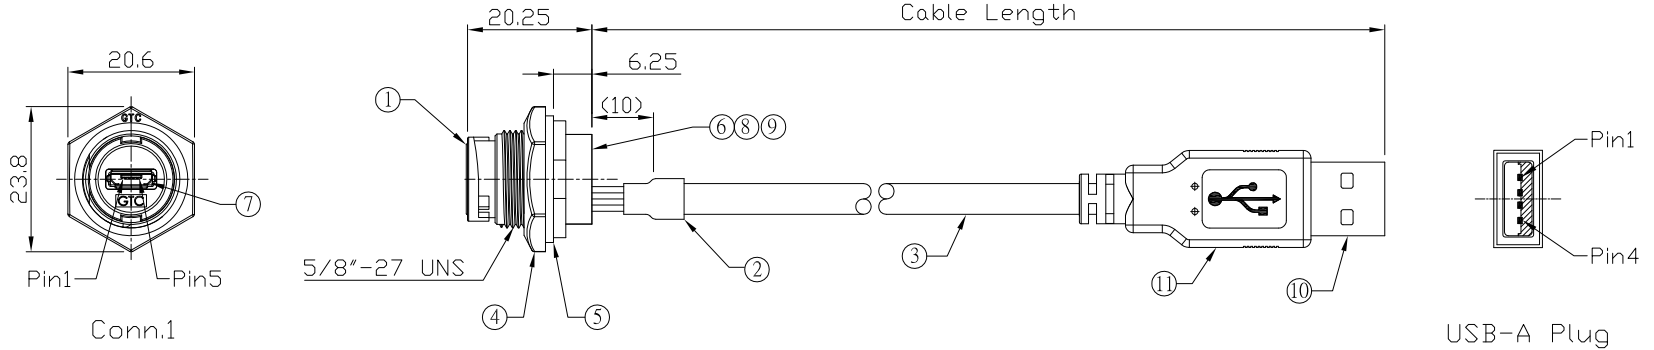

11	Over Mold	PVC Color: Black	1
10	USB-A Plug	Housing: Thermoplastic, Color: Black Contacts: Copper Alloy, Finish: Au Plated Shell: Copper Alloy, Finish: Ni Plated	1
9	Glue	Epoxy Color: Black	
8	Pin Header	Housing: Thermoplastic, Color: Black Contacts: Copper Alloy, Finish: Au Plated	1
7	Micro USB-AB Receptacle	Housing: Thermoplastic, Color: Black Contacts: Copper Alloy, Finish: Au Plated Shell: Copper Alloy, Finish: Sn Plated	1
6	PCB	FR-4 Color: -	2
5	Gasket	Silicone Color: Black	1
4	Hex Nut	Thermoplastic Color: Black	1
3	Cable	UL2725 1P*28AWG+2C*24AWG+Al/My+D+B OD=5.0mm, Color: Black	1
2	Shrink Tube	L=20mm Color: Black	1
1	Housing	Thermoplastic Color: Black	1
Item	Part Name	Material / Finish	Qty



GT11A200-05-02	2000 mm	±100
GT11A200-05-01	1000 mm	±50
GT11A200-03-Z9	900 mm	±40
GT11A200-05-Z8	800 mm	±40
GT11A200-05-Z7	700 mm	±40
GT11A200-05-Z6	600 mm	±40
GT11A200-05-Z5	500 mm	±40
GT11A200-05-Z4	400 mm	±20
GT11A200-05-Z3	300 mm	±20
GT11A200-05-Z2	200 mm	±20
GT11A200-05-Z1	100 mm	±10
Part No.	Cable Length	Tol.

TITLE						DRAWING NUMBER			REV.
Micro USB-AB Plastic C2 Panel Jack Lock With USB-A Plug						GT11A200-05-XX			01
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET
	B	1:1	Lucas 07/30/14	Ray 07/30/14	Ray 07/30/14	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm	1/1

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT Contact CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:
(*) NOT TO REPRODUCE OR COPY IT
(**) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
(*) ALL RIGHTS RESERVED