


Notes: (Unless Otherwise Specified)

1. Waterproof Rate: IP67.
2. Recommend Panel Thickness: 0.8 to 3.0 mm.
3. Recommend Torque: 9~10 Kgf-cm.
4. Mating Cap P/N: GT1C1210X2.
5. RoHS Compliant.


REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
01			Lucas 07/18/14	Ray 07/18/14	Ray 07/18/14
02	ECN-140821	Modify Cable Standard	Lucas 07/30/14	Ray 07/30/14	Ray 07/30/14

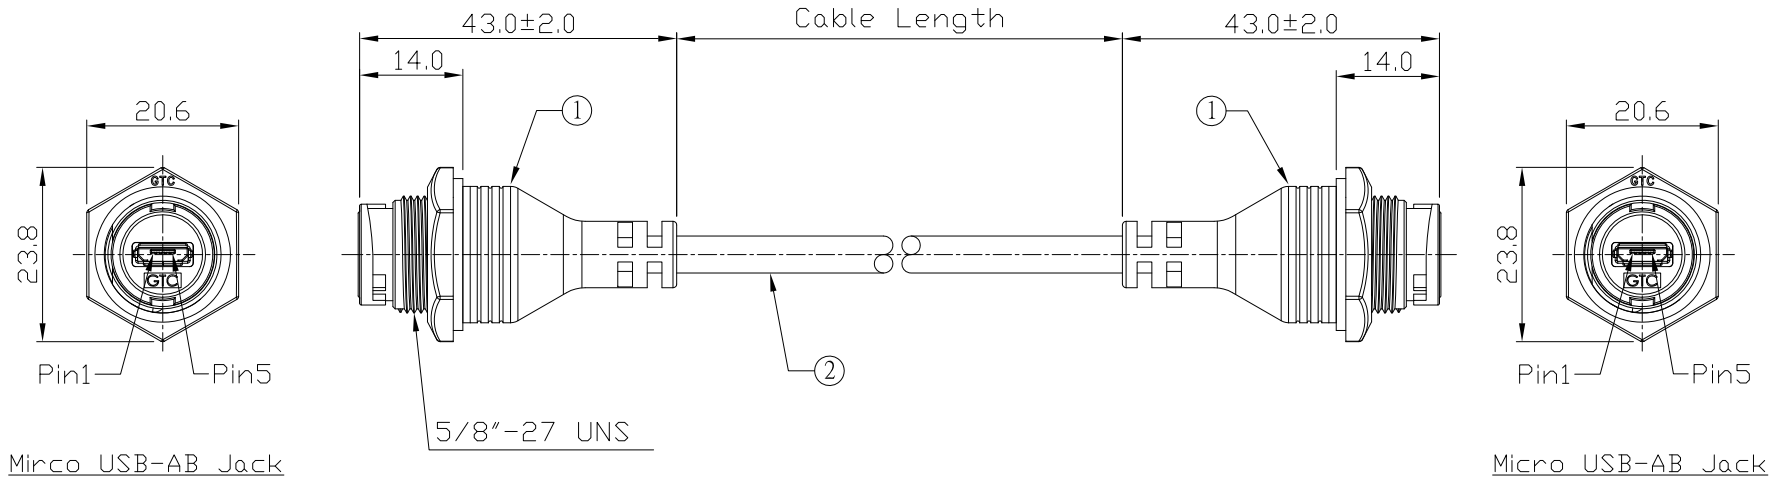

GTC  
R&D DEPT. ISSUE  
AUG.15.2014  
ONLY FOR  
RELEASE



Wiring Diagram



Recommend  
Panel Cut-Out

GT11A210-0M-02	2000 mm	±150
GT11A210-0M-01	1000 mm	±50
GT11A210-0M-Z9	900 mm	±40
GT11A210-0M-Z8	800 mm	±40
GT11A210-0M-Z7	700 mm	±40
GT11A210-0M-Z6	600 mm	±40
GT11A210-0M-Z5	500 mm	±40
GT11A210-0M-Z4	400 mm	±20
GT11A210-0M-Z3	300 mm	±20
GT11A210-0M-Z2	200 mm	±10
GT11A210-0M-Z1	100 mm	±10
Part No.	Cable Length	Tol.

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT CONTACT CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:  
 (1) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE  
 (2) NOT TO REPRODUCE OR COPY IT  
 (3) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART  
 (4) ALL RIGHTS RESERVED

2	Cable	UL2725 1P*28AWG+3C*24AWG+Al/My+D+B Color: Black, DD=5.0mm	1	
1	Micro USB-AB C2 Cable to Cable	GT Contact P/N: GT11A210-01-XX	2	
Item	Part Name	Material / Finish	Q'ty	

TITLE						DRAWING NUMBER			REV.
Micro USB-AB Plastic C2 Cable to Cable Twin-head Jack Lock with Cable						GT11A210-0M-XX			02
	B	1:1	Lucas 07/18/14	Ray 07/18/14	Ray 07/18/14	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm	1/1
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET