


Notes: (Unless Otherwise Specified)
 1. Waterproof Rate: IP67.
 2. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A0		Mass Production	Joyce 11/23/11	Lucas 11/23/11	Ray 11/23/11



Item	Part Name	Material / Finish	QTY
7	Over Mold	PVC Color: Black	2
6	Inner Mold	Thermoplastic Color: Black Or White	2
5	Cable	CAT5E 24AWG*4P+D+Al/My Color: Black, OD=6.0mm	1
4	RJ45 Plug	Housing: Thermoplastic, Color: Clean Contacts: Copper Alloy, Finish: Au Plated Shell: Cold Roll Steel, Finish: Ni Plated	2
3	Rubber Pad	Silicone Color: Black	2
2	Screw Nut	Thermoplastic Color: Black	2
1	Housing	Thermoplastic Color: Black	2

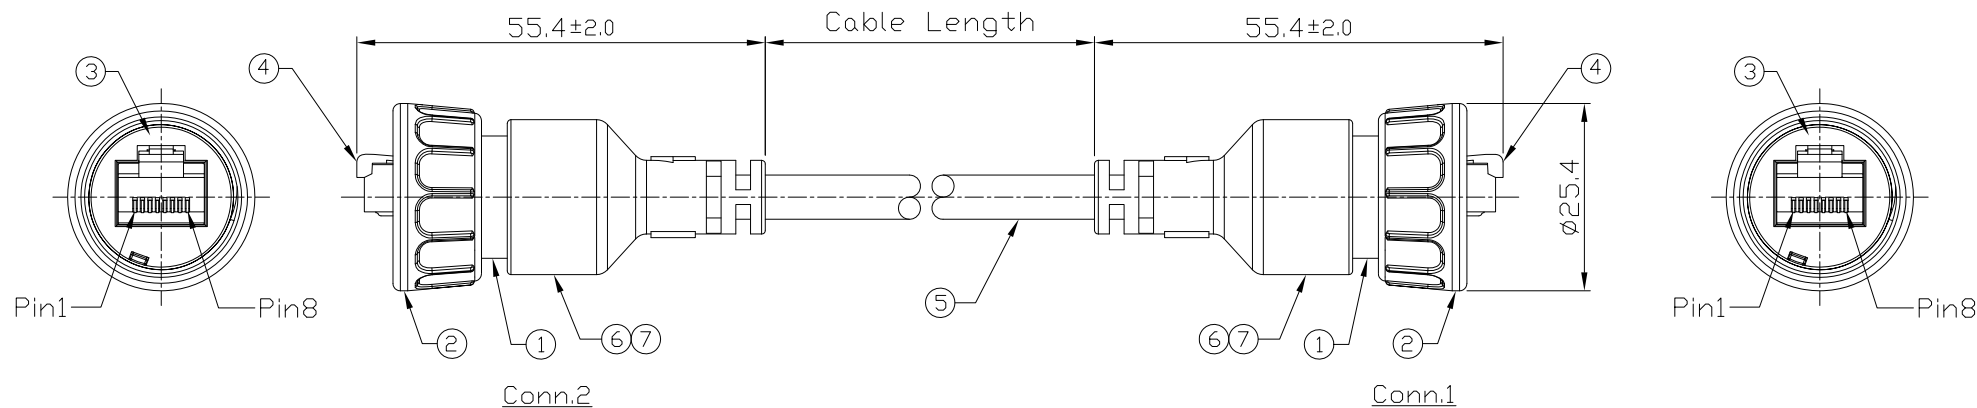

1	White/Orange	1
2	Orange	2
3	White/Green	3
4	Blue	4
5	White/Blue	5
6	Green	6
7	White/Brown	7
8	Brown	8
Shell	Drain	Shell

Part No.	Cable Length	Tol.
GT125320-07-16	16000 mm	+800
GT125320-07-10	10000 mm	+500
GT125320-07-09	9000 mm	+450
GT125320-07-08	8000 mm	+400
GT125320-07-07	7000 mm	+150
GT125320-07-06	6000 mm	+150
GT125320-07-05	5000 mm	+150
GT125320-07-04	4000 mm	+150
GT125320-07-03	3000 mm	+100
GT125320-07-02	2000 mm	+100
GT125320-07-01	1000 mm	+50
GT125320-07-Z5	500 mm	+50

Wiring Diagram

TITLE						DRAWING NUMBER			REV.
RJ45 Plastic C3 Shielded Cable End Twin-head Plug Screw						GT125320-07-XX			A0
	B	1:1	David 04/02/10	Ray 04/02/10	Ray 04/02/10	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm	1/1
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:
 THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT Contact CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:
 (a) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
 (b) NOT TO REPRODUCE OR COPY IT
 (c) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
 (d) ALL RIGHTS RESERVED