

1

2

3

4


Notes: (Unless Otherwise Specified)

- 1. Waterproof Rate: IP68.
- 2. Durability: 100 Cycles Min.
- 3. DWV: 1000 Vrms
- 4. Insulation Resistance: 100 MΩ Min.
- 5. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
01			Jenny 06/15/23	Hank 06/15/23	Lucas 06/15/23

1	Brown
2	Orange
3	Black
4	Yellow
5	Red

Wiring Diagram

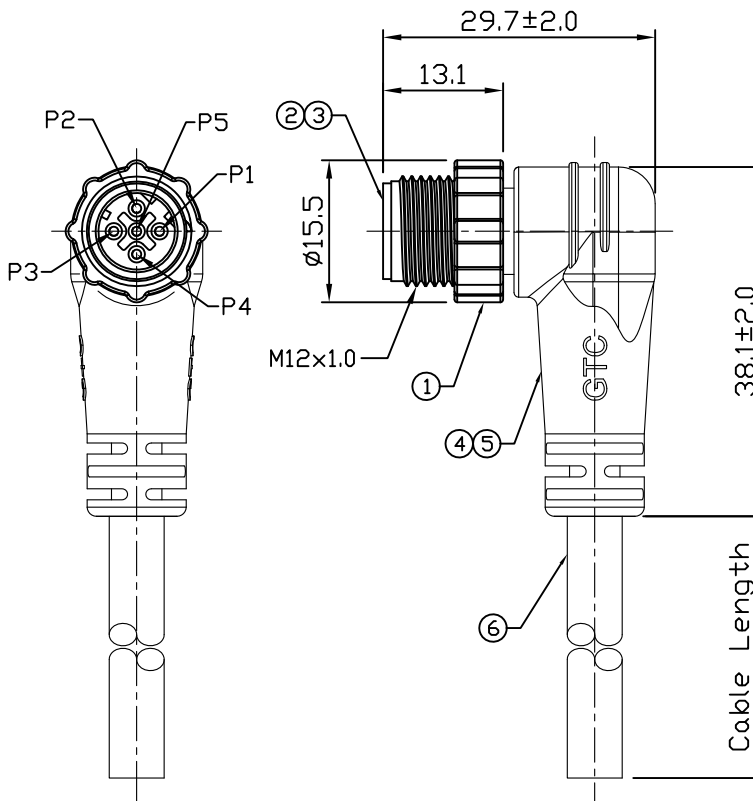

Part No.	Cable Length	Tol.
GT134435-22051-10	10000 mm	+500
GT134435-22051-09	9000 mm	+450
GT134435-22051-08	8000 mm	+400
GT134435-22051-07	7000 mm	+150
GT134435-22051-06	6000 mm	+150
GT134435-22051-05	5000 mm	+150
GT134435-22051-04	4000 mm	+150
GT134435-22051-03	3000 mm	+100
GT134435-22051-02	2000 mm	+100
GT134435-22051-01	1000 mm	+50
GT134435-22051-29	900 mm	+50
GT134435-22051-28	800 mm	+50
GT134435-22051-27	700 mm	+50
GT134435-22051-26	600 mm	+50
GT134435-22051-25	500 mm	+50
GT134435-22051-24	400 mm	+50
GT134435-22051-23	300 mm	+25
GT134435-22051-22	200 mm	+25

Item	Part Name	Material / Finish	Q'ty
6	Cable	UL2464 22AWG*5C+Talc (UV) OD=5.5mm, PVC, Color: Black	1
5	Over Mold	PVC Color: Black	1
4	Inner Mold	Thermoplastic Color: White or Black	1
3	Contacts	Copper Alloy Finish: Au Plated	5
2	Housing	Thermoplastic Color: Black	1
1	Screw Nut	Thermoplastic Color: Black	1

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT Contact CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:
① TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
② NOT TO REPRODUCE OR COPY IT
③ NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
④ ALL RIGHTS RESERVED

TITLE						DRAWING NUMBER			REV.	
M12 D-Coding Plastic 4A 5P Cable End 90° Male						GT134435-22051-XX			01	
	B	1:1	Jenny 06/15/23	Hank 06/15/23	Lucas 06/15/23	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm	1/1	
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET	

1

2

3

4