

1

2

3


4

Notes: (Unless Otherwise Specified)

- 1. Waterproof Rate : IP67.
- 2. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A0			Hank 08/28/23	Hank 08/28/23	Lucas 08/28/23

GTC  
DOC.CENTER.ISSUE  
SEP.04.2023  
ONLY FOR  
RELEASE

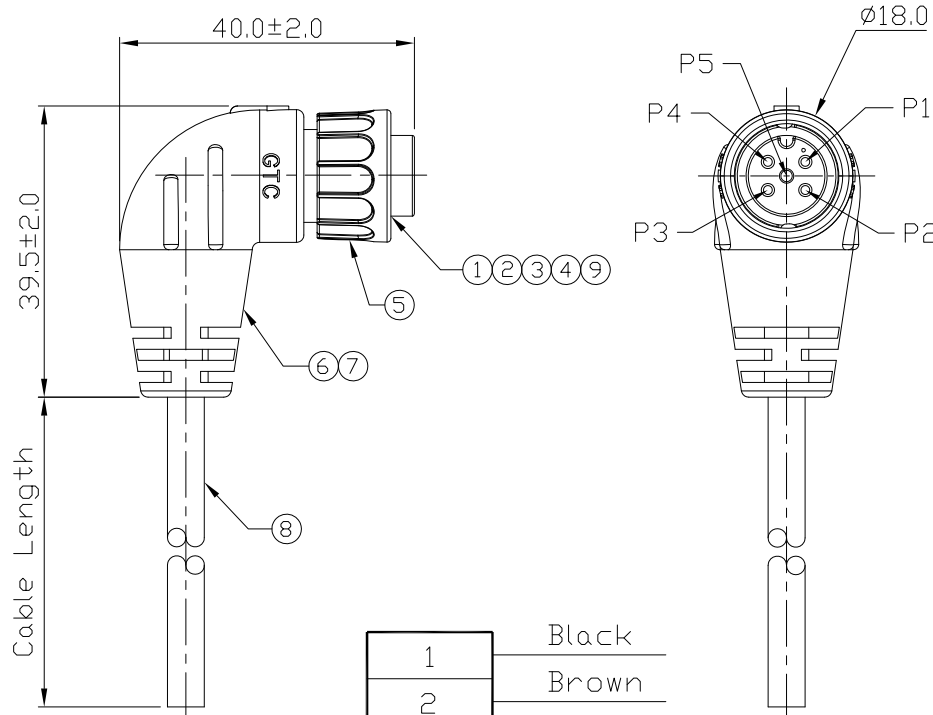

1	Black
2	Brown
3	Red
4	Orange
5	Yellow

Wiring Diagram

Part No.	Cable Length	Tol.
GT152225-22051-10	10000 mm	+500
GT152225-22051-09	9000 mm	+450
GT152225-22051-08	8000 mm	+400
GT152225-22051-07	7000 mm	+150
GT152225-22051-06	6000 mm	+150
GT152225-22051-05	5000 mm	+150
GT152225-22051-04	4000 mm	+150
GT152225-22051-03	3000 mm	+100
GT152225-22051-02	2000 mm	+100
GT152225-22051-01	1000 mm	+50
GT152225-22051-Z9	900 mm	+50
GT152225-22051-Z8	800 mm	+50
GT152225-22051-Z7	700 mm	+50
GT152225-22051-Z6	600 mm	+50
GT152225-22051-Z5	500 mm	+50
GT152225-22051-Z4	400 mm	+50
GT152225-22051-Z3	300 mm	+25
GT152225-22051-Z2	200 mm	+25
GT152225-22051-Z1	100 mm	+25

Item	Part Name	Material / Finish	Q'ty
8	Cable	UL2464 24AWG*5C+D+Al/My OD=5.0mm, Color: Black	1
7	Over Mold	PVC Color: Black	1
6	Inner Mold	Thermoplastic Color: White or Black	1
5	Lock Nut	Thermoplastic Color: Black	1
4	Base	Thermoplastic Color: Black	1
3	O-Ring	Silicone Color: Red	1
2	Contacts	Copper Alloy Finish: Au Plated	5
1	Housing	Thermoplastic Color: Black	1

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:  
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT Contact CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:  
(a) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE  
(b) NOT TO REPRODUCE OR COPY IT  
(c) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART  
(d) ALL RIGHTS RESERVED

TITLE C2 5A 5P Cable End 90° Female Lock With Cable					DRAWING NUMBER GT152225-22051-XX			REV. A0	
THIRD ANGLE PROJECTION	SIZE B	SCALE 1:1	DRAW / DATE Hank 08/28/23	CHECK / DATE Hank 08/28/23	APPROVE / DATE Lucas 08/28/23	TOLERANCES X.X ± 0.5 X.XX ± 0.2		UNIT mm	SHEET 1/1

1

2

3

4