

Notes: (Unless Otherwise Specified)



1. Waterproof Rate : IP67.
2. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A0		Mass Production	Lucas 09/02/20	Lucas 09/02/20	Ray 09/02/20

GTC
DOC.CENTER.ISSUE
SEP.02.2020
ONLY FOR
RELEASE

1	Black
2	Brown
3	Red
4	Orange
5	Yellow
6	Green
7	Blue
8	Violet
9	Gray
10	White
11	Pink
12	Light Green
	Drain

Wiring Diagram

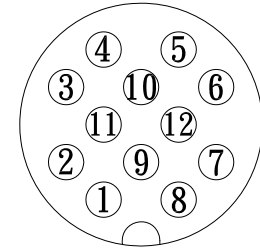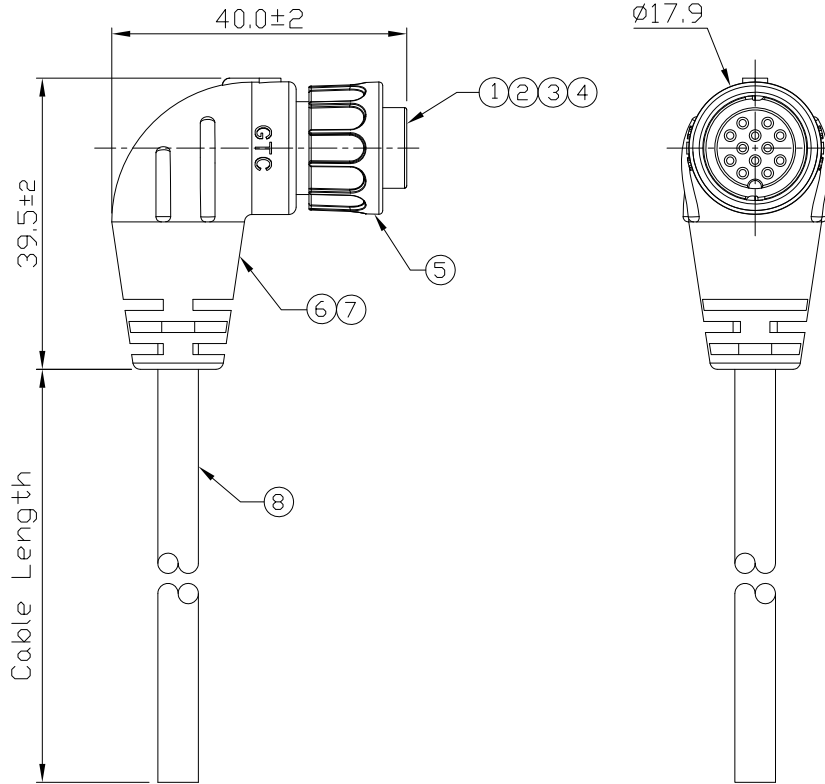

Pin Assignment

Item	Part Name	Material / Finish	Q'ty
8	Cable	UL2464 26AWG*12C+D+Al/My (UV) ØD=6.0mm, Color:Black	1
7	Over Mold	PVC Color: Black	1
6	Inner Mold	Thermoplastic Color: White or Black	1
5	Lock Nut	Thermoplastic Color: Black	1
4	Base	Thermoplastic Color: Black	1
3	O-Ring	Silicone Color: Red	1
2	Contacts	Copper Alloy Finish: Au Plated	12
1	Housing	Thermoplastic Color: Black	1

GT152229-21121-10	10000mm	+500
GT152229-21121-09	9000mm	+450
GT152229-21121-08	8000mm	+400
GT152229-21121-07	7000mm	+150
GT152229-21121-06	6000mm	+150
GT152229-21121-05	5000mm	+150
GT152229-21121-04	4000mm	+150
GT152229-21121-03	3000mm	+100
GT152229-21121-02	2000mm	+100
GT152229-21121-01	1000mm	+50
GT152229-21121-Z9	900mm	+50
GT152229-21121-Z8	800mm	+50
GT152229-21121-Z7	700mm	+50
GT152229-21121-Z6	600mm	+50
GT152229-21121-Z5	500mm	+50
GT152229-21121-Z4	400mm	+50
GT152229-21121-Z3	300mm	+25
GT152229-21121-Z2	200mm	+25
GT152229-21121-Z1	100mm	+25
Part No.	Cable Length	Tol.

TITLE						DRAWING NUMBER			REV.	
C2 2A 12P Cable End 90° Key Down Female Lock With Cable						GT152229-21121-XX			A0	
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET	
	B	1:1	Lucas 09/02/20	Lucas 09/02/20	Ray 09/02/20	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm	1/1	

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT Contact CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:
(a) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
(b) NOT TO REPRODUCE OR COPY IT
(c) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
(d) ALL RIGHTS RESERVED