



Notes: (Unless Otherwise Specified)  
 1. Waterproof Rate: IP67.  
 2. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
01			Lucas 05/30/19	Lucas 05/30/19	Ray 05/30/19

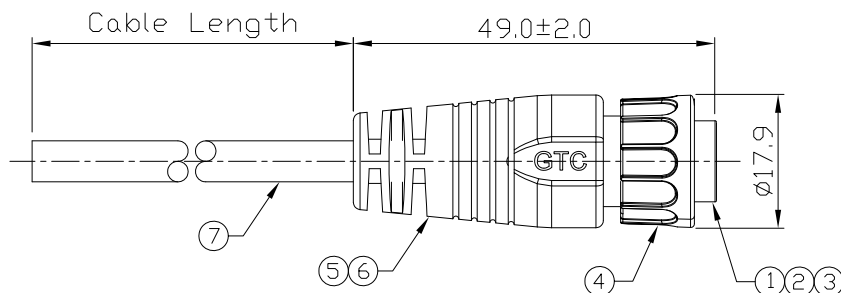

1	Brown
2	Blue
3	White
4	Green
5	Yellow
6	Gray
7	Violet
8	Red
9	Black
10	Orange

Wiring Diagram

GT152234-21101-10	10000 mm	+500
GT152234-21101-09	9000 mm	+450
GT152234-21101-08	8000 mm	+400
GT152234-21101-07	7000 mm	+150
GT152234-21101-06	6000 mm	+150
GT152234-21101-05	5000 mm	+150
GT152234-21101-04	4000 mm	+150
GT152234-21101-03	3000 mm	+100
GT152234-21101-02	2000 mm	+100
GT152234-21101-01	1000 mm	+50
GT152234-21101-Z9	900 mm	+50
GT152234-21101-Z8	800 mm	+50
GT152234-21101-Z7	700 mm	+50
GT152234-21101-Z6	600 mm	+50
GT152234-21101-Z5	500 mm	+50
GT152234-21101-Z4	400 mm	+50
GT152234-21101-Z3	300 mm	+25
GT152234-21101-Z2	200 mm	+25
GT152234-21101-Z1	100 mm	+25
Part No.	Cable Length	Tol.

Item	Part Name	Material / Finish	Q'TY
7	Cable	UL2464 26AWG*10C+D+Al/My ØD=6.0mm, Color:Black	1
6	Over Mold	PVC Color: Black	1
5	Inner Mold	Thermoplastic Color: White or Black	1
4	Lock Nut	Thermoplastic Color: Black	1
3	O-Ring	Silicone Color: Red	1
2	Contacts	Copper Alloy Finish: Au Plated	10
1	Housing	Thermoplastic Color: Black	1

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:  
 THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT CONTACT CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:  
 (a) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE  
 (b) NOT TO REPRODUCE OR COPY IT  
 (c) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART  
 (d) ALL RIGHTS RESERVED

TITLE						DRAWING NUMBER			REV.
C2 2A 10P Cable End Male Lock With Cable						GT152234-21101-XX			01
	B	1:1	Lucas 05/30/19	Lucas 05/30/19	Ray 05/30/19	XX ± 0.5 XXX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm	1/1
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET